

# 5800SS1

The 5800SS1 Wireless Shock Sensor mounts directly on glass surfaces. It provides excellent detection for all types of glass while eliminating false alarms. It is intended for use with ADEMCO's 5800 wireless systems only. The 5800SS1 is especially effective in acoustically hard, reverberant rooms like kitchens, bathrooms and laundry rooms that are prone to false alarms. Since it is a shock sensor, the 5800SS1 is immune to the sounds that cause false alarms. Installation is a snap, just pull the battery tab to enroll the transmitter, peel the adhesive backing and mount. There's no need to open the case for any reason except to change the battery years later.

## FEATURES:

- Effective in acoustically hard areas such as kitchens, bathrooms, skylights and occupied areas
- Mounts directly to glass surfaces with 3M™ adhesive tape.
- Mounts quickly and easily without having to remove the cover
- Protects all types of glass
- Requires no adjustments




*Actual Size*

**Wireless  
Shock  
Sensor**

# 5800SS1

## INSTALLATION:

1. The 5800SS1 serial number must be enrolled into the control panel prior to usage in the system. To activate the transmitter, remove the "PULL TO CONNECT BATTERY" tab (see figure 1). For additional transmissions, lightly tap on the base of the sensor.

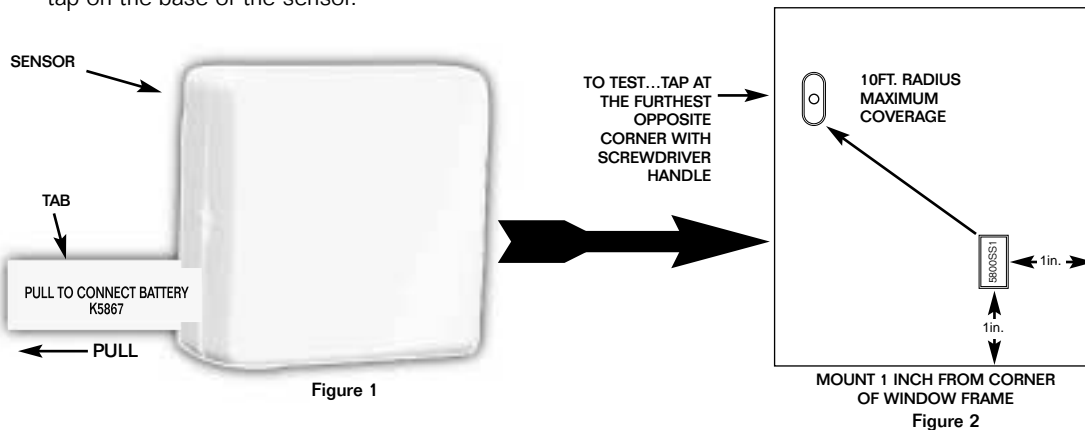

2. Determine the optimum mounting location. The sensor should be mounted one inch from the corner edge of the window frame (see Figure 2).
3. Mount to glass by removing the 3M™ tape backing paper and firmly pressing the sensor in the desired mounting location as shown.
4. To verify operation, tap the furthest opposite corner of the glass with a screwdriver handle.
5. Positive verification ensures detection. The energy required to break the glass is significantly greater.

## SPECIFICATIONS:

### Glass Coverage:

- Plate, Laminated, Wired, Sealed Insulated, Coated and Tempered, up to 1/4", (6.35mm) thick
- 10 ft (3m) distance from mounting location
- One sensor is required for each separate pane of glass

### Dimensions:

- 1.6" H x 1.6" W x 0.8" D (41mm x 41mm x 20mm)

### Power:

- Single 3V Panasonic CR2, Sanyo CR2, or Duracell DLCR2 lithium battery

### Operating Temperature:

- 0°F to 130°F (-18°C to +55°C)

### Compatibility:

- Use with all VISTA control panels that support 5800 series wireless devices

**Wireless  
Shock  
Sensor**

## ORDERING:

Part No.	Description
5800SS1	Wireless Shock Sensor