


TRUE

UTV-SBI-15CK

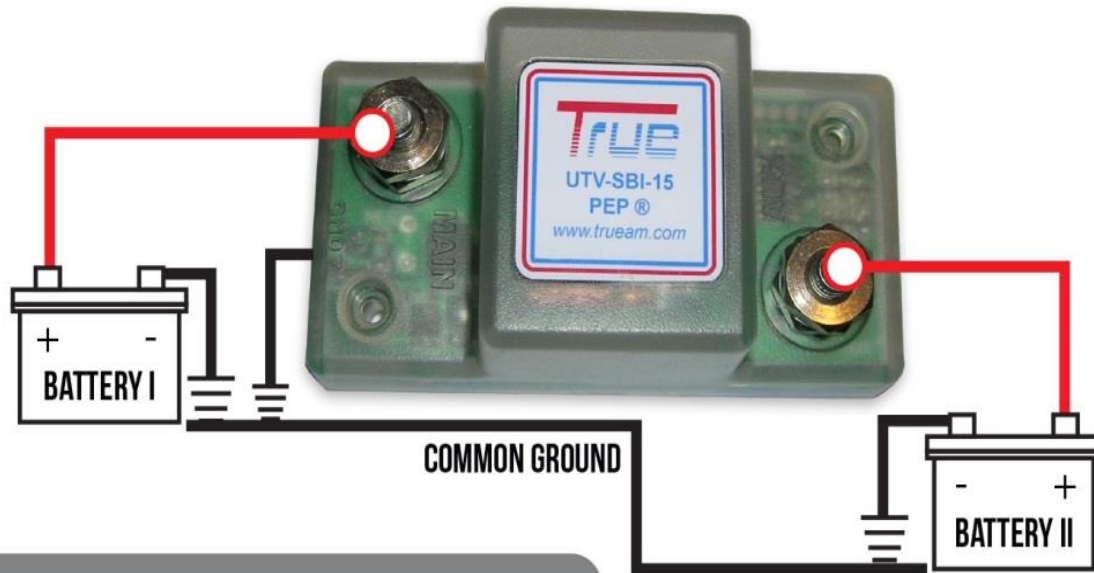

INSTALLATION INSTRUCTIONS

FYI: The SBI is designed ambidextrous so it cannot be installed backwards. Either stud can be connected to either battery's positive terminal.

1. Disconnect the neg. terminal of your battery(ies)
2. Red cables: Slip red insulators over small(6mm) cable lugs
3. Attach lugs to the SBI studs finger tight
4. Route and connect SBI between positive terminal of Batteries
5. Mount with screws, 3M Dual Lock™, or leave suspended
6. Route small black ground from SBI to common ground
7. Install black cable from 2nd battery to common ground
8. Tighten all connections (PLASTIC do not over tighten)
9. Reconnect the neg. terminals
10. Start engine verify function with SBI illumination*

***Note:** It is normal for LED to remain lit when engine is first turned off. To test unit turn headlights on briefly and LED should go out.