







DIAPER-DEPOT®

SAFE-SITTER CHILD PROTECTION SEAT

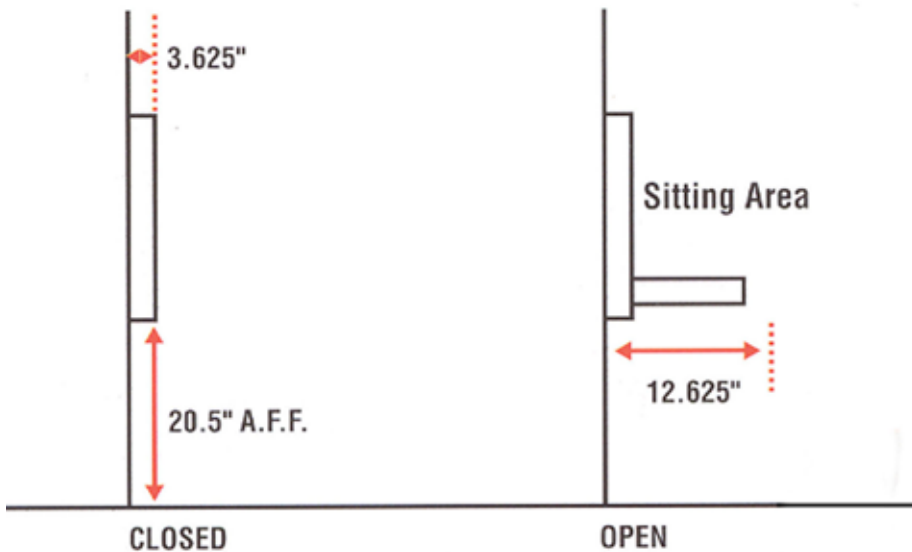

COLORS AVAILABLE

-  Ivory
-  White
-  Powder Gray

Specification:

Unit should be constructed from high density polyethylene which prohibits the retention of moisture and odors, reinforced steel rods to increase unit stability. Unit should be provided with the necessary hardware to install on most wall types and a self adhesive sign for installation on rest room door. Unit should be proven to withstand at least 150lbs. of static weight. Unit shall have warning information. (Pictured above) Unit shall be equipped with a genuine Safe-Strap® safety strap and the strap should be a three point harness for extra safety. Unit should have head and side support for added protection. Unit should contain a concave seating area to ensure child's comfort and protection.

Unit should protrude no more than 4" from the wall in it's closed position and less than 13" when fully open. Unit should contain punch-out pre-drilled holes. The seat should be able to fold up for compact storage when not in use. Unit should be equipped with a molded-in diaper bag hook for customer convenience. Unit should be provided with a mounting template for easy installation. All hardware for installation in most wall types should be provided. Unit should comply with the following ADA Accessibility Guidelines when applicable and installed to the manufacturer's specifications: 4.4.1 Protruding Objects, 4.2.5 Forward Reach, 4.2.6 Side Reach, 4.23.3 and 4.23.7 Fixtures, 4.32.3 Knee Clearances at Counter and 4.32.4 Height of Counters.

The illustrations and descriptions herein are applicable to production as of the date of this Cut Sheet. The manufacturer reserves the right to, and does from time to time, make changes and improvements in designs and dimensions.

The world of retail can be a complicated place.
At Safestrap™ we are committed to simplifying it.

SAFESTRAP.COM

Corporate Office
SAFESTRAP COMPANY, INC.
105 West Dewey Avenue, Building D
Suite 410, Wharton, NJ 07885

Toll Free: 1.800.356.7796
Phone: 973.442.4623
Fax: 973.442.8195