



North American Headquarters
 601 Rayovac Drive
 Madison, WI 53711
 Telephone 1-800-331-4522
 Internet www.rayovac.com

Marketing Data Sheet - Batteries

S66000XXX
 Issue A
 March 22, 2007

Rayovac Stock Number: **808**

Name: **808 ALKALINE**

ENGINEERING DATA:

Cell Chemistry: Alkaline

Designation: ANSI/NEDA – 908A

Nominal Voltage: 6 volts

Approximate Weight: 2 Lb 4 Oz (1.0 Kg)



Approximate Volume: 32 CU IN (524.4 CU CM)

Operating Temp. Range: -30° C to 55° C (-20° F to 130° F)

Terminals: Spring

Shell: Plastic, Ultrasonically sealed.

Environmental: Meets Environmental Protection Agency (EPA)
 Requirements For Landfill Disposal.
 No Mercury Added Formulation
[Rayovac Material Safety Sheets](#)

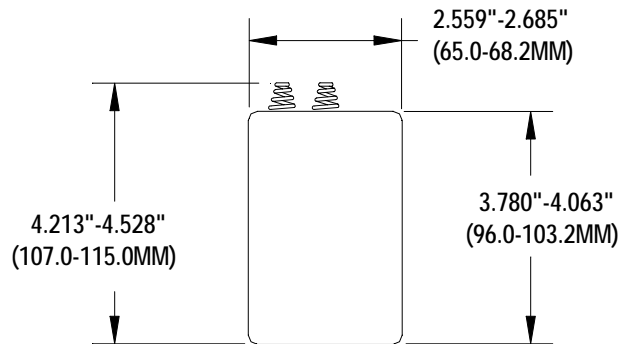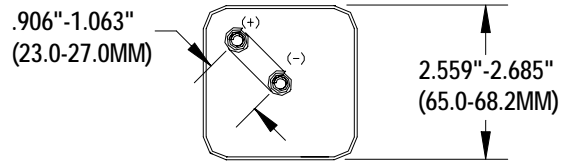

Dimensions shown are
ANSI / IEC standards

TYPICAL INITIAL SERVICE AT 70°F (HOURS)

APPLICATION DUTY CYCLE	Load (Ohms)	Current (mA at 4.8V)	Service to 3.6V	mAh Capacity To 3.6V
PORTABLE LIGHT (30 MIN/HR-8 HR/DAY)	9.1	527	31	15800
PORTABLE LIGHT (30 MIN/HR-8 HR/DAY)	33	145	135	19575
STEADY BURN BARRICADE (12 HR/DAY)	110	44	456	20060

This data is subject to change. Performance information is typical. Contents herein do not constitute a warranty.