



North American Headquarters  
601 Rayovac Drive  
Madison, WI 53711  
Telephone 1-800-331-4522  
Internet [www.rayovac.com](http://www.rayovac.com)

Marketing Data Sheet - Batteries

S6600177  
Issue R  
Memo No: [MDSR0104](#)

Rayovac Stock Number: **AL-C**

Name: **AL-C (C) INDUSTRIAL ALKALINE**

**ENGINEERING DATA:**

**Cell Chemistry:** Alkaline

**Designation:** ANSI/NEDA – 14AC (C), IEC – LR14

**Nominal Voltage:** 1.5 volts

**Approximate Weight:** 2.5 Oz (70 grams)


**Approximate Volume:** 1.6 CU IN (26.2 CU CM)

**Operating Temp. Range:** -30° C to 55° C (-20° F to 130° F)

**Terminals:** Flashlight

**Shell:** Plastic

**Environmental:** Meets Environmental Protection Agency (EPA) Requirements For Landfill Disposal.  
No Mercury Added Formulation  
[Rayovac Material Safety Sheets](#)

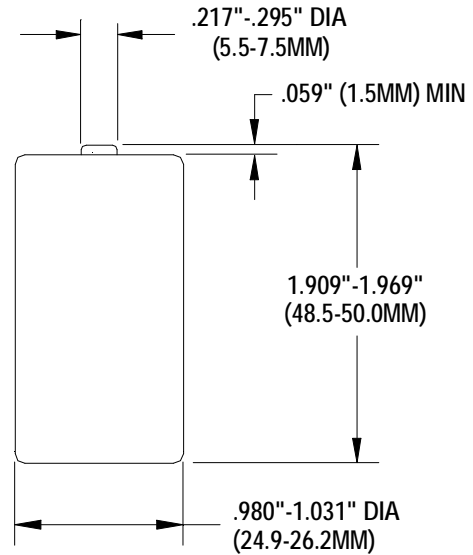

Dimensions shown are ANSI/IEC standards

**TYPICAL INITIAL SERVICE AT 70°F (HOURS)  
CUTOFF VOLTAGE**

APPLICATION <u>DUTY CYCLE</u>	LOAD <u>(OHMS)</u>	CURRENT <u>(MA at 1.2V)</u>	<u>CUTOFF VOLTAGE</u>					mAh <u>CAPACITY To 0.9V</u>
			1.2V	1.1V	1.0V	0.9V	0.8V	
RADIO (4 HRS/DAY)	20	60	79	97	118	128	-	7,848
CASSETTE (1 HR/DAY)	6.8	176	18.6	29.1	33.8	37.7	-	6,689
FLASHLIGHT (4 MIN/HR-8 HR/DAY)	3.9	308	9.3	15.6	19.1	20.9	-	6,364
TOY/GAME (1 HR/DAY)	3.9	308	7.2	13.6	17.5	19.8	21.7	5,942
FLASHLIGHT (CONTINUOUS)	3.9	308	6.2	12.6	17.2	20.0	22.2	5,853

**This data is subject to change. Performance information is typical. Contents herein do not constitute a warranty.**