



IMC-1000S

100/1000Base-T to 100/1000Base-X SFP Slot Fiber Converter

IMC-1000S is an industrial grade, non-managed, Gigabit Ethernet media converter that supports conversion between electrical 10/100/1000Base-T and optical 100/1000Base-X Ethernet. Simple DIP switch settings allow configuring the UTP port for auto-negotiation or for forced 10/100/1000 speed and half/ full duplex as well as for enabling LFPT (Link Fault Pass Through), Ethernet flow control (802.3x) and selecting Switch Mode (store & forward) or Converter Mode (Jumbo frame Pass-through). Housed in rugged DIN rail or wall mountable enclosures, these converters are designed for harsh environments, such as industrial networking and intelligent transportation systems (ITS) and are also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications.

Features

- Redundant dual DC input power 12/24/48VDC (9.6 ~ 60VDC)
- IP30 rugged metal housing and fanless
- Wide operating temperature -20 ~ 75°C
- UL60950-1, CE, FCC, Railway traffic EN50121-4 certification
- Industrial Grade EMS, EMI, EN61000-6-2, EN61000-6-4 certified
- Store-and-Forward mode and Pass through mode (set by DIP SW)
- Conversion between 10/100/1000Base-T and 100/1000Base-X Fiber cable interface
- Provides a DIP-Switch to set functions
- Supports LFPT (Link Fault Pass Through)

Specifications

Standard	IEEE802.3 10Base-T 10Mbit/s Ethernet IEEE802.3u 100Base-TX, 100Base-FX, Fast Ethernet IEEE802.3ab 1000Base-T Gbit/s Ethernet over twisted pair IEEE802.3z 1000Base-X Gbit/s Ethernet over Fiber-Optic IEEE802.3x Flow Control	Reserve Polarity Protection	Present
RJ45 Ports	10/100/1000Base-TX	Overload Current Protection	Present
Fiber Ports	SFP Slot	Power Supply	12/24/48VDC (9.6~60VDC) , Redundant power with polarity reverse protect function and removable terminal block Provide DC Power JACK adapter cable for external Power adapter
Data Process Architecture	Store and Forward mode or Pass through mode set by DIP SW	Power Consumption	4.2W
Jumbo Frame	9K bytes	Alarm Relay Contact	Relay outputs with current carrying capacity of 1 A @24VDC
Fiber Parameters	Fiber Cable (Multi-mode): 50/125um, 62.5/125um Fiber Cable (Single-mode): 9/125um Wavelength: 1310nm (Multi-mode/Single-mode) SFP, Distance depend on Fiber Transceiver	Removable Terminal Block	Provides 2 Redundant power, Alarm relay contact
Link Fault Pass Through (LFPT)	TX-Fiber: If TX port link down, the media converter will force Fiber port to link down Fiber-TX: If Fiber port link down, the media converter will force TX port to link down	Operating Humidity	5% ~ 95% (Non-condensing)
DIP Switch	Off: Alarm For Power Enable On: Alarm For Power Disable Off: Alarm For Port Enable On: Alarm For Port Disable Off: LFPT Disable On: LFPT Enable Off: Switch Mode On: Converter Mode Off: 1000Base-X On: 100Base-FX	Operating Temperature	-10 ~ 60°C (IMC-1000S) -20 ~ 75°C (IMC-1000S-E)
Connector	SFP Slot RJ-45 Socket: CAT 5e Twisted Pair cable Auto MDI/MDI-X and Auto-Negotiation Function Supports	Storage Temperature	-40 ~ 85°C
LED	Per Unit: Power 1 (Green), Power 2 (Green), Fault (Amber) LNK/ACT for Fiber(Green): ON : Connected to network/ OFF : Not connected to network/ BLK : Receive /Transmit Data SFP Fiber speed: Yellow : 1000Base-X Green : 100Base-FX	Housing	Rugged Metal, IP30 Protection and fanless
LED	RJ-45 port: Speed: 10 (OFF), 100 (Green), 1000 (Yellow) LNK/ACT for RJ45(Green): ON: Connected to network/ OFF: Not connected to network/ BLK: Networking is active	Dimensions	106 x 38 x 142 mm (D x W x H)
		Weight	620g (IMC-1000S, IMC-1000S-E)
		Installation	DIN Rail or wall mounting
		MTBF	578,980Hrs (IMC-1000S, IMC-1000S-E)
		Warranty	5 years
		Certification	
		EMC	CE
		EMI (Electromagnetic Interference)	FCC Part 15 Subpart B Class A, CE EN55022 Class A
		Railway Traffic	EN50121-4
		Immunity for Heavy Industrial Environment	EN61000-6-2
		Emission for Heavy Industrial Environment	EN61000-6-4


Industrial Unmanaged GbE Converter

EMS	EN61000-4-2 (ESD) Level 3, Criteria B
	EN61000-4-3 (RS) Level 3, Criteria A
	EN61000-4-4 (Burst) Level 3, Criteria A
	EN61000-4-5 (Surge) Level 3, Criteria B
	EN61000-4-6 (CS) Level 3, Criteria A
	EN61000-4-8 (PFMF, Magnetic Field) Field Strength: 300A/m, Criteria A


Safety	UL60950-1
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Application & Topology

► **Figure :** IMC-1000S Media Converter Transmission

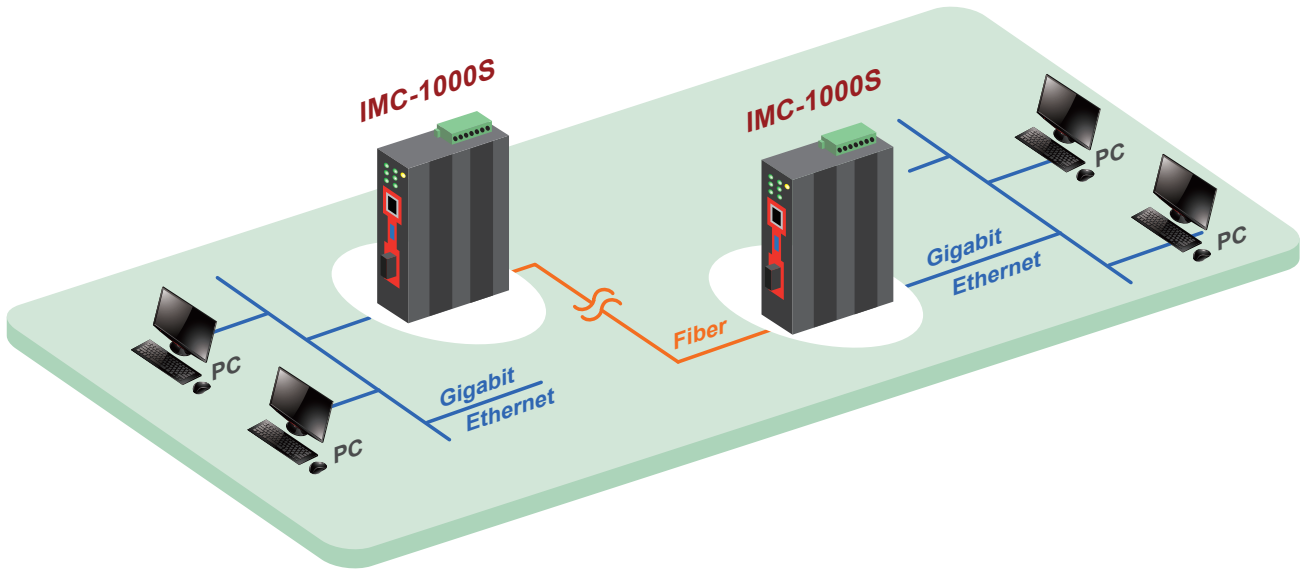


Dimensions

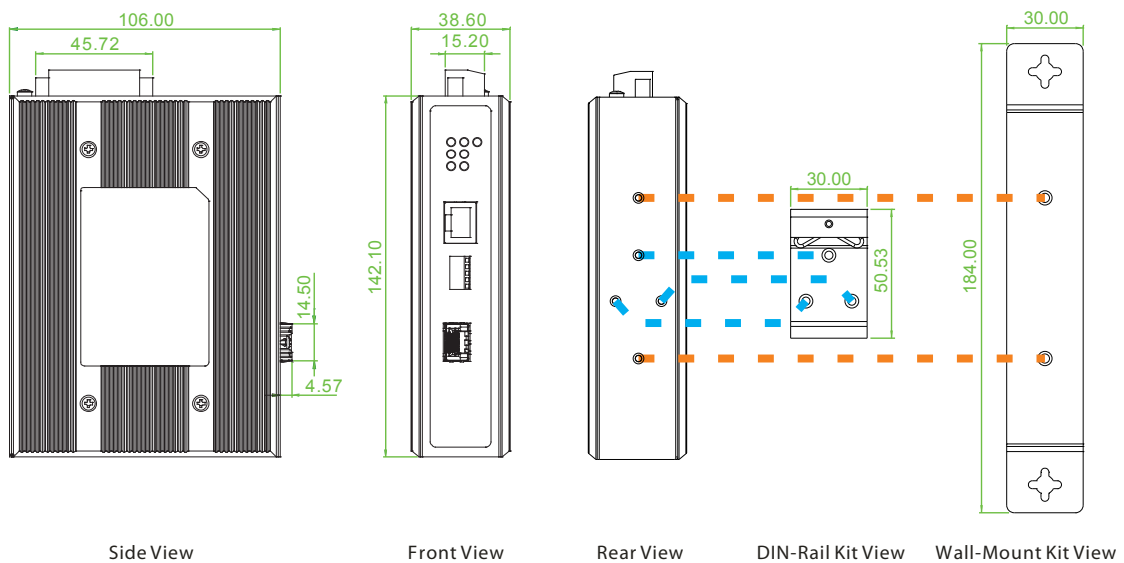

Ordering Information

Model Name	UTP	Fiber	Certification					Operating Temperature
	10/100/1000 Base-T	Dual Speed 100/1000Base-X	Safety UL60950-1	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE	FCC	
IMC-1000S	1	1 SFP	V	V	V	V	V	-10~60 C
IMC-1000S-E	1	1 SFP	V	V	V	V	V	-20~75 C

Model Naming Rule

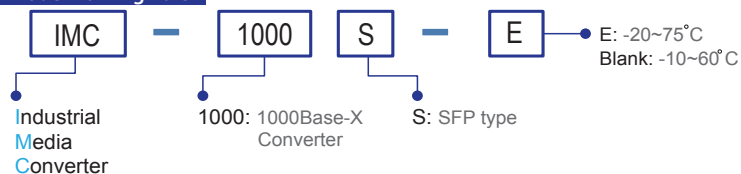

Optional Accessories

Industrial Power Supply

DR-4524 Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 48W, -10 ~ +50°C

MDR-40-24 Industrial Power, Input 85 ~ 264VAC, Output 24VDC, 40W, -20 ~ +70°C


Industrial SFP Transceiver

(The ISFP series of industrial grade SFP modules have been fully tested with the IMC-1000S product for guaranteed compatibility and performance. The best performance can be guaranteed even in mission-critical applications.)

(Please see CTC Union's Industrial SFP datasheet for more details and more items.)

ISFP-M7000-85-(E)	Industrial SFP GbE 1000Base-SX, M/M, 500 meter, wave length 850nm, 7.5dB, LC, -10~70°C (-40~85°C)
ISFP-S7020-31-(E)	Industrial SFP 1000Base-LX, S/M, 20km, wave length 1310nm, 15dB, LC, -10~70°C (-40~85°C)
ISFP-T7T00-00-(E)	Industrial SFP 1000Base-T UTP 100meter, -10~70°C (-40~85°C)
ISFP-M5002-31-(E)	Industrial SFP 155M 100Base-FX, MM, 2km, wave length 1310nm, 12dB, LC, -10~70°C (-40~85°C)
ISFP-S5030-31-(E)	Industrial SFP 155M 100Base-FX, SM, 30km, 1310nm, 19dB, LC, -10~70°C (-40~85°C)
ISFP-T3T00-MA-(E)	Industrial SFP 100Mbps, long reach UTP (2 wire) (500meter), Master, -10~70°C (-40~85°C)
ISFP-T3T00-SL-(E)	Industrial SFP 100Mbps, long reach UTP (2 wire) (500meter), Slave, -10~70°C (-40~85°C)

SFP Naming Rule

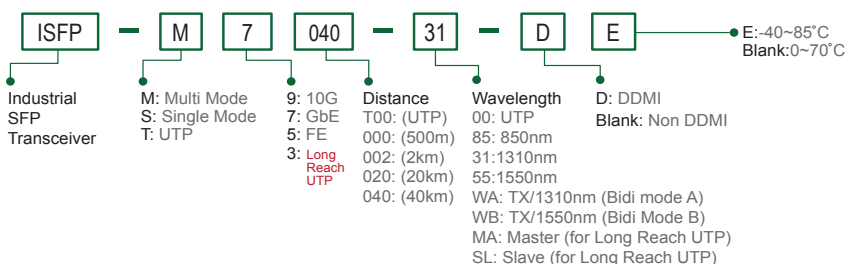

Package List

- IMC-1000S device
- Quickly installation guide
- Din Rail bracket with screws
- Wall mount bracket with screws
- Terminal block
- Protective caps for SFP ports
- DC Power JACK adapter cable