



## VDSL2 LAN Extender

# VDTU2A-301

2 LAN Extender

The VDTU2A-301 is our lowest cost LAN extension solution using the G993.1/993.2 VDSL2 technology and providing up to 100Mbps throughput with only a single copper wire pair. A LAN extender is a device that forwards traffic between LANs transparently to higher network-layer protocols over distances that far exceed the distance limitations of standard Ethernet. A LAN is a high-speed data network (usually employing Ethernet technology) that connects computer workstations, printers, servers, and other devices. Designed specifically for LAN to LAN extension and supporting both symmetrical and asymmetrical transmission at up to 100/75Mbps within 300 meters or 10/10Mbps rate at 1000 meters, this is a perfect solution to extend a LAN to an adjacent building, garage or any location outside of the 100 meter reach of Ethernet UTP.


### Features

- Cost effective bridge function to connect two Ethernet LANs
- 100/75Mbps @ 300m (980 Ft)
- 10/10Mbps @ 1km (3300 Ft)
- Support flow control via Pause frame or back pressure
- 802.1Q VLAN tag transparent
- Selectable CPE and CO mode via DIP switch
- Selectable fast and interleaved mode
- Selectable target band plan
- Selectable target SNR margin 9dB or 6dB


### Specifications

<b>LAN Interface</b>	Complies with IEEE 802.3 10Base-T and 802.3u 100Base-TX Connector: RJ45 MTU: 1536 Bytes
<b>VDSL2 Interface</b>	Complies with ITU-T G993.1/993.2/ G997.1 Connector: RJ45 DMT encoding On-board surge protection
<b>4-position DIP Switch</b>	Selectable CO or CPE mode Selectable fast or interleave mode ( Impulse noise protection) Selectable Band plan (Symmetric or Asymmetric) Selectable target SNR margin (6dB or 9dB)
<b>Indicator</b>	LAN: Act/Link, 10/100Mbps, Half/Full duplex VDSL: CO/CPE, Idle/Trained/Link, Power
<b>Standard</b>	ITU-T G.993.1, 993.2, IEEE802.3, 802.3u
<b>Power</b>	DC 12V via AC switching adapter
<b>Power Consumption</b>	4.2W
<b>Dimensions</b>	97 x 73 x 23mm (D x W x H)
<b>Weight</b>	80g
<b>Temperature</b>	0 ~ 50°C (Operating), -10 ~ 70°C (Storage)
<b>Humidity</b>	10 ~ 90% non-condensing
<b>Certification</b>	CE, FCC, RoHS
<b>MTBF</b>	50,000 hrs

### Rack to Standalone Solution

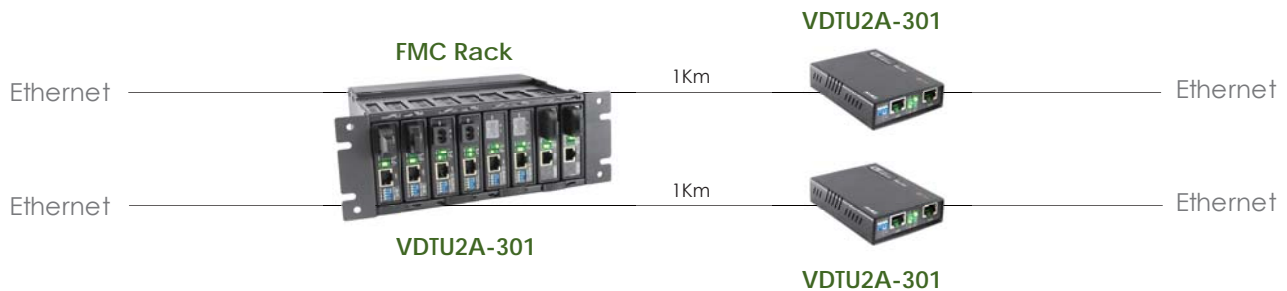

### Standalone to Standalone Solution

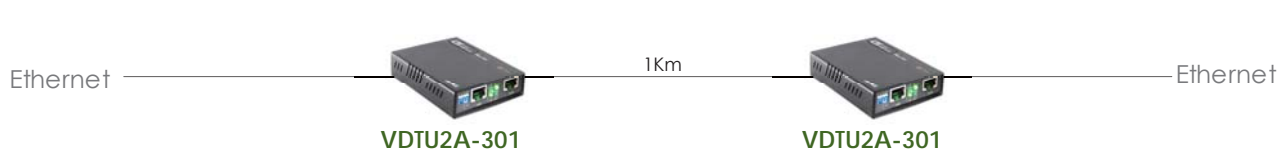

### Ordering Information

Model Name	Description
VDTU2A-301	VDSL2 LAN Extender with 1x10/100TX