

# powermaster

## CSWI

CSWI controls industrial vehicular swinging gates up to 1800 pounds, with a maximum width of 30 feet. Units can cycle up to 45 times per hour, with a gate speed of 13 seconds from open to close.

### Standard Features:

- Easy Set Limits
- Timer to Close
- Master/Slave Operation
- Left/Right Changeover in Field
- Built-In Control Station for Easy Setup



*Complete selection of control stations  
& accessories are available.*

All gate operators must have contact and non-contact sensing system installed for operator to work properly and safely.

[www.VEpower.net](http://www.VEpower.net)

[Facebook.com/PowerMasterOperators](https://www.facebook.com/PowerMasterOperators)

**SERVICING THE INDUSTRY SINCE 1969**


# CSWI

## Specifications & Features

- Power requirements: 115/230 Volts, 1 phase OR 230/460 Volts, 3 phase
- Class 2 low voltage control circuit
- Available horse power: 1/2 HP - 2 HP
- UL 325 Listed for use I Class I through IV application
- V-belt primary reduction for smooth, quiet and positive operation
- Drive arm easily disconnected for manual operation in case of power failure

### OPTIONAL EQUIPMENT

- Gear box heater for cold climates
- Thermostatically controlled cooling fan for hot climates
- Magnetic gate lock
- Loop detector
- Card key reader

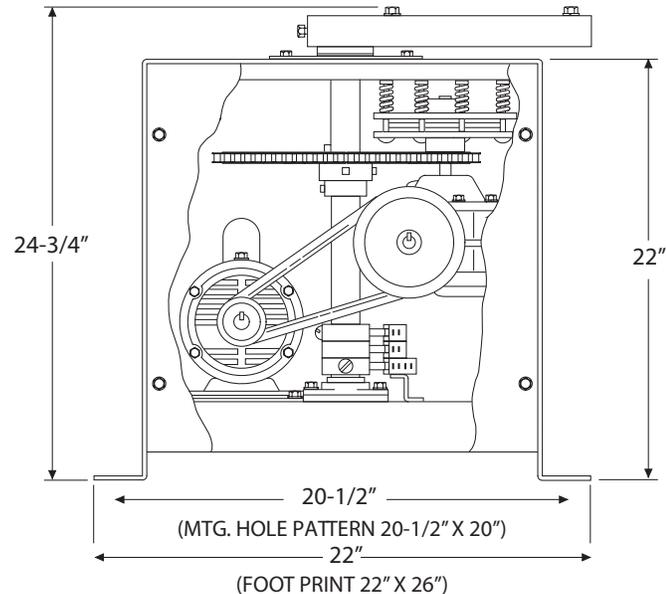

HEAVY DUTY 7 GA STEEL FRAME

HARD SHELL BAKED ON WEATHER  
RESISTANT POWDER COATING

TRAVEL SPEED: 13 SECONDS TO FULL OPEN  
OR FULL CLOSE

GATE CAPACITY: 1800 LBS, 30 FT WIDE. UP  
TO 45 CYCLES PER HOUR

**SHIPPING WEIGHT: APPROX. 220 LBS**

## CAUTION

A moving gate can cause serious injury or death!

Carefully read and follow all safety instructions, precautions, and guidelines when installing and using this product.

Motorized gates are for vehicles only. Pedestrians must use a separate entrance. **NO ONE SHOULD CROSS THE PATH OF A MOVING GATE!**

Proper reversing devices must be installed on gates to avoid all hazards, pinch points and entrapment. Eliminate all hazards, pinch points and entrapment areas.

Warning signs must be permanently installed and visible to traffic and pedestrians.

Do not mount operating devices accessible through gates or between a gate and wall.

Never allow children to lay in the path of a gate. Never allow children to operate or play with the gate controls.

Follow UL 325 and ASTM F220-02 standards.

Do not install this product unless all hazards, pinch points and entrapment points are protected.

