


The 9' Emergency Tower provides an easy and economical solution for emergency communication and signaling. The Towers are compatible with all T2100 telephones.

The T2100 series of emergency telephones are designed to withstand the rigors of harsh weather and environments, with electronics sealed with a Mil-Spec protective coating and protected speaker and microphone openings. They can be connected to analog telephone lines from any CO, PBX, or Key system, or integrated into VOIP systems through a VOIP gateway.

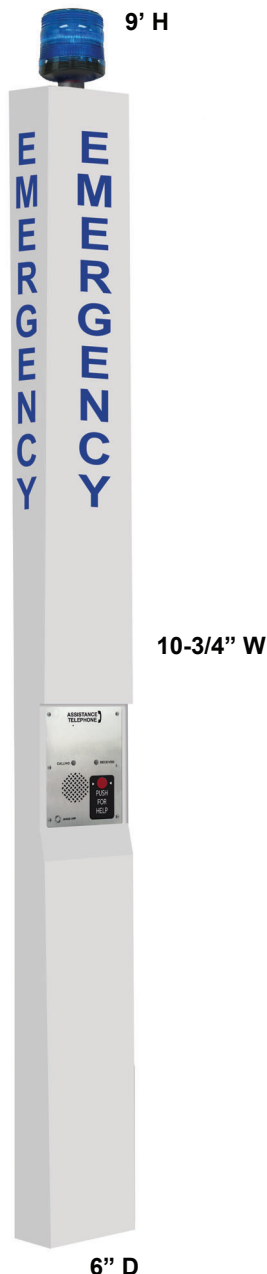

### Key Features:

- True Talk™ Full Duplex Speaker Phone
- Complies with the requirements of the Americans with Disability Act (ADA)
- FCC registered
- Built-in four number dialer
- Two visual call progress indicators
- Automatic number identifier
- Tone feature for patron signaling
- Two programmable auxiliary outputs
- Remotely programmable
- One or two programmable messages
- Programmable ring count

### Optional Features:

- Dome Camera
- Discrete View Camera
- Custom colors and lettering
- Amber or red strobe
- Dual button face plate

### Communication Options:

- Landline
- Cellular
- VoIP

### Power Options:

- 12VDC or 120VAC (standard)
- 277VAC
- 480VAC
- Dusk2Dawn (battery backup)

### Color Options:

- |   |   |
|---|---|
| <input type="checkbox"/> White (Standard) | <input type="checkbox"/> Campus Green         |
| <input type="checkbox"/> Red Letter       | <input type="checkbox"/> Postal Blue          |
| <input type="checkbox"/> Equipment Blue   | <input type="checkbox"/> Architectural Bronze |
| <input type="checkbox"/> Safety Yellow    |   |