



EN81-20 Installation Guidelines for E10 20

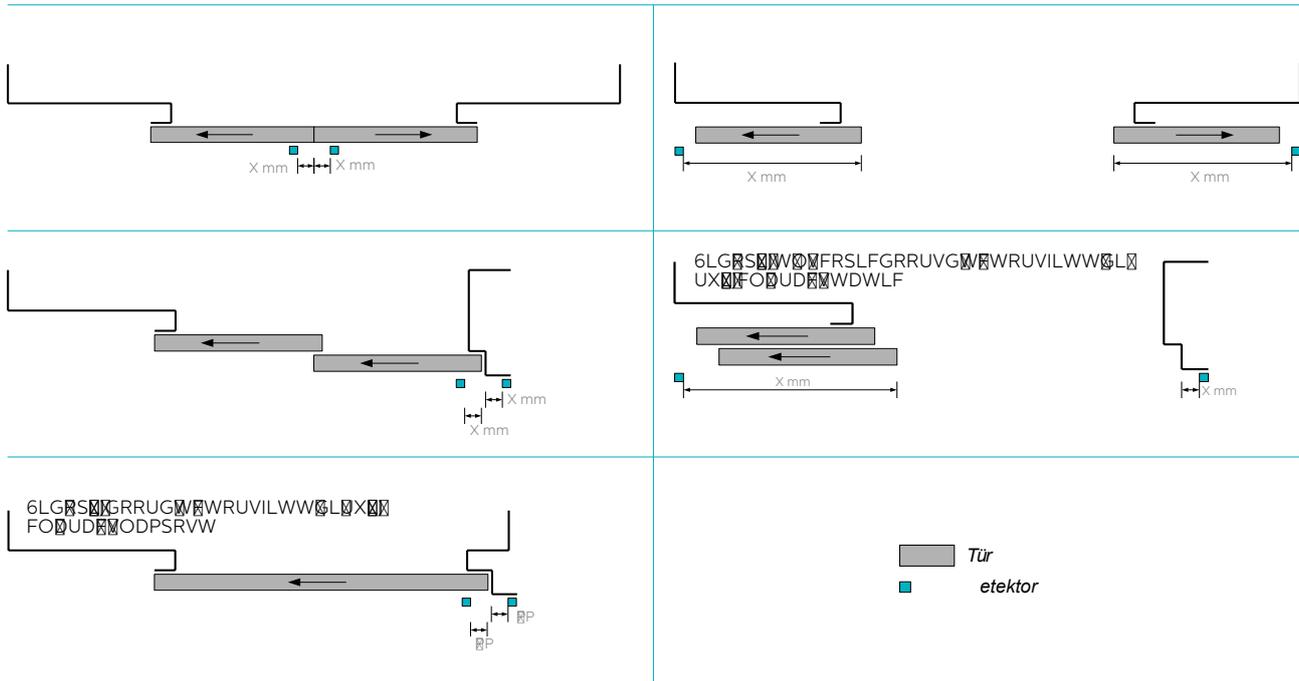

/LJKWFXUWDLWKGLRGSDFLJUDWVKD
 PPFDWLWLOOFRPSOWK(1X
 LWDOODWVWRPVEDFNGLVWDEURPWK
 IWKWRUGRRU7KLVJXLGKR
 KRDFRPSOWK(1L
 VSLILFLWDOODWLR
 (LVFRPSOLDLWDOODWLR

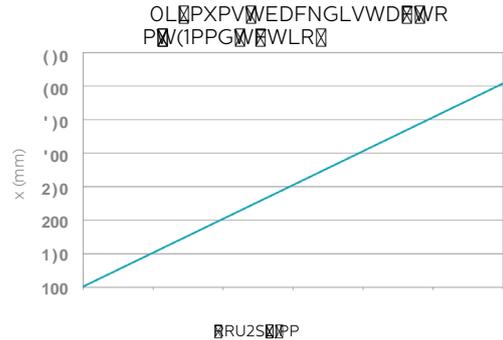

Cleaning of Light Curtains

Light curtains are not waterproof and their performance can deteriorate or result in a complete failure if scratched or damaged. This can be caused by using abrasive cloths or inappropriate solvents. Light curtains should be cleaned using a light-colored cloth.

This product is designed for use in elevators with powered automatic doors where the closing energy is less than 10J in normal operation and less than 4J during de-activation of the light curtains or less as per EN81 requirements. It should be installed by qualified personnel only, therefore any use outside of this application is at the installer's own risk and should be assessed appropriately.

If you wish to include more than one set of detectors in the same installation, please contact our Technical Support team for guidance.

As a result of our policy of continual improvement, the information in this document is subject to change without notice and it is intended only as general guidance on product performance and suitability. This information shall not form part of any contract.