


The G3 Phone is the most compact elevator telephone on the market. Designed for the highest reliability, the G3 uses surface mount technology. With a quick four point connection, the G3 reduces your installation time. The unit is phone line powered, which means less maintenance and a longer life compared to battery operated alternatives.

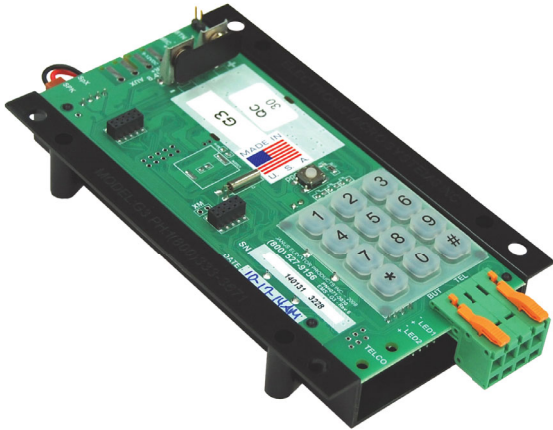

Part #: G3

Features:

- Phone line powered
- ADA compliant
- Phone line monitoring available
- On board keypad
- Optional on board relay
- Mounts behind the COP
- Built in four number dialer
- Extended voice chip capability
- Easy installation and programming
- Fully programmable voice chip
- Available in one or two LED version
- FCC Registered
- CSA Listed
- Two year warranty
- Positive acknowledgement of alarm received
- Tone activated (not fooled by voicemail or other recordings)
- Voice prompts reduce operator error

Specifications:

- **Dimensions:** 3-1/4" W x 5-1/2" H x 3/4" D
- **Weight:** 1/2 lb.
- **Frequency Response:** 550Hz - 3400Hz, +/- 3db
- **Dialing:** DTMF (Dual Tone Multi Frequency)
- **Ring Sensitivity:** 40-120vac RMS
- **REN:** 0.2B
- **Loop Current Range:** 10mA to 60mA (20mA typical)
- **Optional AC adaptor:** 12vdc@500mA
- **Operating Current Range:** 25mA to 55mA
- **Power:** Telephone line powered (48vdc to 50vdc typical)
- **Relative Humidity:** Up to 95% (non-condensing)
- **Operating Temp:** -40 to 185 degrees F
- **Industry Canada No.:** C22.2 No.60950-1-07, 2nd Ed
- **FCC Reg. No.:** US: NLFTE07BG3X7771
- **Mounting Type:** COP mount