



Flush Mount Part #: SHWFSV

Front Frame Dimensions: 21.13" H x 25" W x 3.06" D

Back Box Dimensions: 20.66" H x 22.99" W x 3" D

Surface Mount Part #: SHWSV

Dimensions: 21.03" H x 20.3" W x 5.19" D

Style:

- Powder coated steel enclosure
- Twist lock closure for use with Fireman's lock (not provided)
- Coil cord
- Pre-configured to the SmartView Software

Head-End Features:


- FCC registered & CSA listed
- Connects multiple telephones to a single telephone line
- Functions as a stand-alone intercom system
- On-board keypad
- Low battery alarm call
- Built in three number dialer
- Fully programmable voice chip
- On or offsite monitoring capabilities
- Onsite diagnostic read-out
- Phone-line monitoring available

SmartView Display & Controller Features:

- Display requires 9v@1.2A and includes 120v plug-in transformer
- Mini PC requires 12v@1.5A and includes 120v plug-in transformer
- Requires back-up power
- Ethernet connection
- HDMI connection for display

ASME A17.1 2019 Code Change Compliant

Flush Mount:

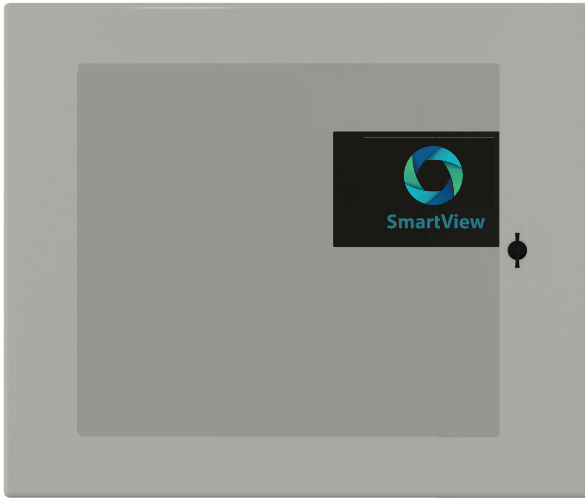

Front View




Angled View




Side View


Flush Mount:

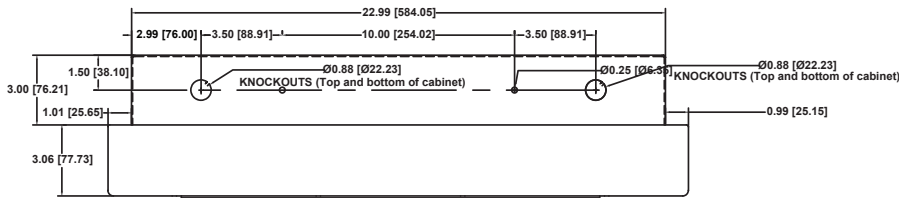

Top

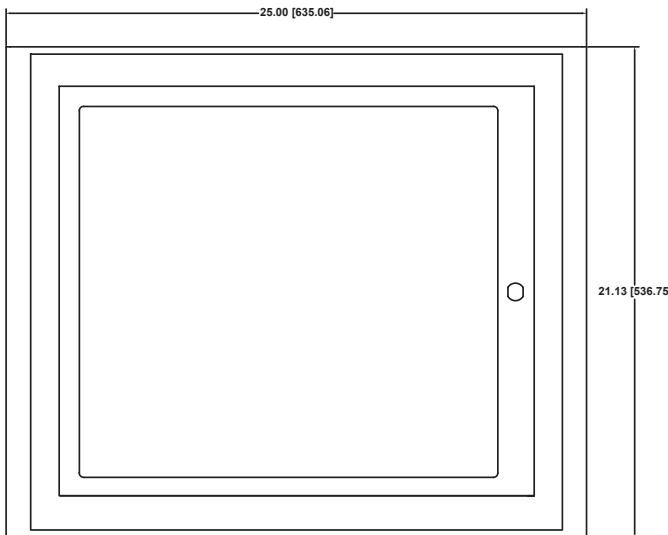

Front

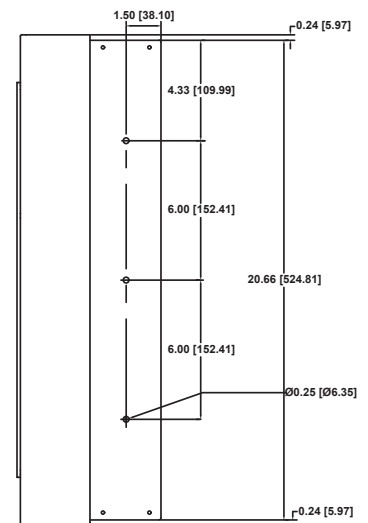

Side