



SmartView Display

Part Numbers:

- 2100-SVD (0.0625" window)
- 2100-SVDA (0.125" window)
- 2100-SVDB (0.109" window)
- 2100-SVDC (0.078" window)
- 2100-SVDE (0.118" window)


Features:

- **Overall Dimensions:** 2.98" H x 5.35" W x 0.63" D
- **Panel Cut Out Dimensions:** 2.67" H x 4.37" W
- **Operating Temperature:** -4°F to 158°F (-20°C to 70°C)
- **Power Requirement:** 5V/1A power supply with 5.5mm barrel connector, or powered by the SmartView Controller
- Includes 20' power cable and 20' HDMI cable to connect to the SmartView Controller
- Includes clear protective window
- 5" screen size
- 3/16" default text size
- 800 x 480 pixels
- 75° viewing angle
- Certified to CSA Standard B44.1, conforms to ASME Standard 17.5


ASME A17.1 2019 Code Change Compliant



Front View

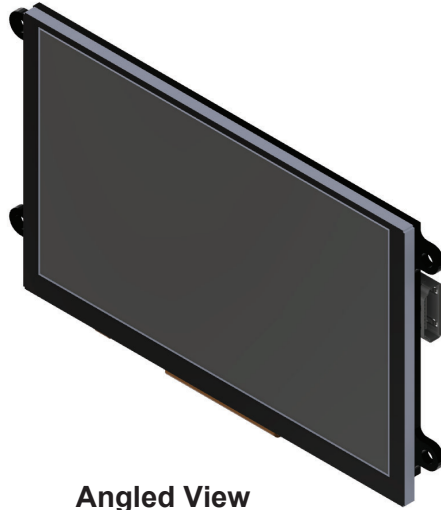

Angled View



Side View

