

In Bound








988 Sophisticate, 867 Sail Boat

## In Bound

Traditional woods to contemporary grey tones with rustic flair, In Bound is a 12 mil floating LVT featuring our Uniclic® Locking System for dimensional stability and an adhesive free installation. M-Force™ Enhanced Urethane offers maximum wear and stain resistance for light commercial and contract residential spaces.

### Features

- Diverse color line from traditional woods to contemporary grey tones with rustic flair
- 5.91" x 48.62" plank size
- 12 mil wear layer protected with M-Force™ Enhanced Urethane Finish
- 3.2MM overall thickness
- Uniclic® Locking System keeps planks tightly in place for excellent dimensional stability and saves on adhesive cost
- No-polish maintenance reduces costs
- FloorScore® Certified
- Limited 10 Year Light Commercial Warranty
- Limited 25 Year Residential Warranty

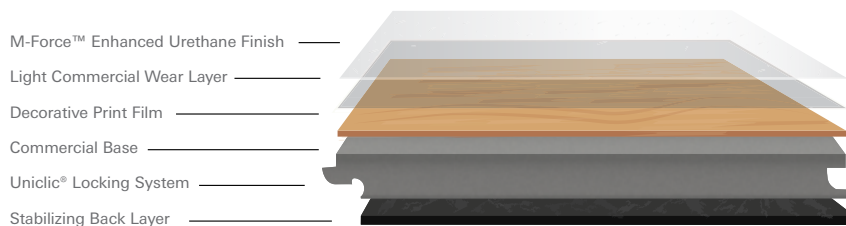

In Bound features a 12 mil commercial wear layer with M-Force™ Enhanced Urethane finish offering polish-optional for cost-effective maintenance.



Uniclic is the premier locking system in the hard surface industry, reducing time and costs associated with installation of luxury vinyl tiles. Uniclic's special tongue and groove shape easily creates a tight connection between joints.







# Specifications

<div style="border: 1px solid black; width: 15px; height: 15px; margin-bottom: 5px;"></div> <b>LVT</b>	<b>Brand ..... Aladdin Commercial</b> <b>Style Name / Number ..... In Bound / AV010</b> <b>Product Type..... Floating LVT</b> <b>Construction ..... Light Commercial Grade Floating Luxury Vinyl Tile</b> <b>Gauge ..... 3.2MM</b> <b>Wear Layer ..... 12 mil (0.3mm)</b> <b>Finish ..... M-Force™ Enhanced Urethane</b> <b>Colors Available..... 10</b> <b>Size ..... 5.91" x 48.62"</b> <b>Packaging SF/CTN..... 31.9 (50 Cartons/Pallet) (47.41 lbs/Carton)</b> <b>Classification..... ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed</b> <b>Squareness ..... ASTM F2055 - Passes - 0.010 in. max</b> <b>Size and Tolerance ..... ASTM F2055 - Passes - ±0.016 in. per linear foot</b> <b>Thickness ..... ASTM F386 - Passes - as specified ±0.005 in. (±0.13 mm)</b> <b>Flexibility..... ASTM F137 - Passes - ≤ 1.0 in., no crack or breaks</b> <b>Dimensional Stability ..... ASTM F2199 - Passes - 0.15% max (0.020 in. per linear foot)</b> <b>Residual Indentation..... ASTM F1914 - Passes - Average less than 8%</b> <b>Slip Resistance..... ASTM C1028 &gt; .5</b> <b>Resistance to Chemicals..... ASTM F925 - Passes - No Change</b> <b>Resistance to Light ..... ASTM F1515 - Passes - ΔE ≤ 8</b> <b>Resistance to Heat..... ASTM F1514 - Passes - ΔE ≤ 8</b> <b>Critical Radiant Flux..... ASTM E648 - Passes - ≥ 0.45 watts/cm<sup>2</sup>, Class 1</b> <b>Smoke Density..... ASTM E662 - Passes - &lt; 450</b> <b>Installation ..... Floating LVT with Uniclic® Locking System</b> <b>Adhesive ..... No Adhesive Required. May use MS160 Spray or M95.0 Acrylic</b> <b>Optional Underlayment ..... None required, but when needed for acoustics, use Mohawk ActiveSound™</b> <b>Certification ..... FloorScore® Certified</b> <b>Warranty..... Limited 10 Year Light Commercial</b> <b>Limited 25 Year Residential Warranty</b>
--------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**Aladdin™**  
COMMERCIAL

Mohawk Industries, Inc. warrants its adhesives for the life of the original installation only when a Mohawk Industries style (product) is installed. Mohawk's floor preparation procedures must be followed to ensure that the substrate has been prepared properly. Failure to use Mohawk Industries adhesives or to follow Mohawk's floor preparation procedures will void all lifetime adhesive warranties. Please contact your local Sales Representative for installation guidelines.

Mohawk is providing this architect folder for the purpose of promoting our commercial business. Color may vary from dye lot to dye lot. Substitution of material may be made due to improved technology, supply limitations or other factors. The performance of this product is not affected by such variations. We recommend the use of chair pads on all commercial installations.

**For current and complete specifications please call tech support at 888-387-9881 or visit [www.mohawkflooring.com](http://www.mohawkflooring.com) | 800.233.4490**

