




Quiet Cover

with In*Step™ Locking System

Quiet Cover was designed in a large plank format for stunning style and leading performance. The 7" width accentuates the natural beauty of various hardwood species and installs quickly over large areas. Each pattern has a unique texture including subtle wood ticking, linear pine or undulating hand-scrape. The modern color line ranges from natural oak, maple and cherry to contemporary grey and cool tones. Our exclusive ExoGuardTM finish protects against wear from foot traffic and contains an added antimicrobial. Simple installation, sound reduction and beautiful designs work together, making Quiet Cover ideal for retail store, restaurant, hospitality and multifamily housing applications.


Collection









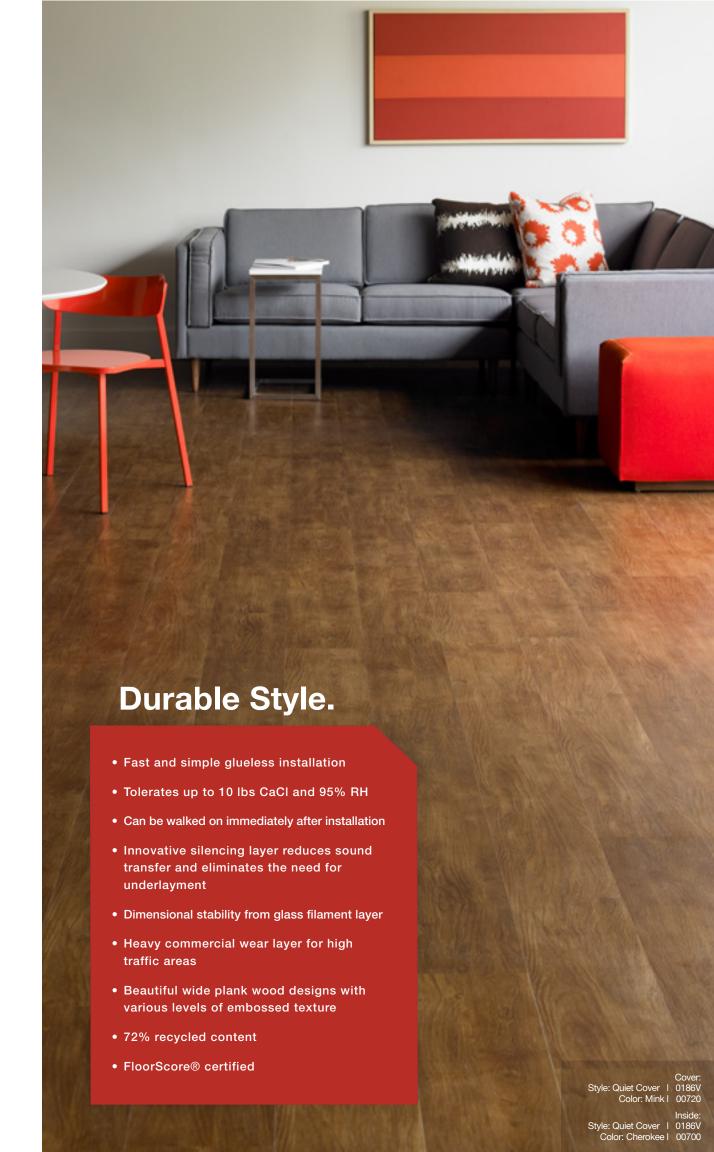



Quiet Cover


with In*Step™ Locking System

Quiet Cover was designed in a large plank format for stunning style and leading performance.

The 7" width accentuates the natural beauty of various hardwood species and installs quickly over large areas. Each pattern has a unique texture including subtle wood ticking, linear pine or undulating hand-scrape. The modern color line ranges from natural oak, maple and cherry to contemporary grey and cool tones. Our exclusive ExoGuardTM finish protects against wear from foot traffic and contains an added antimicrobial. Simple installation, sound reduction and beautiful designs work together, making Quiet Cover ideal for retail store, restaurant, hospitality and multifamily housing applications.

In*Step™ Locking System

In*Step is Shaw Hard Surface's revolutionary tongue and groove system that locks luxury vinyl planks together without the use of adhesive. The patented edge profile is designed into all four sides, ensuring a tight fit between joints and preventing seam separation from commercial traffic. Simple installation starts with the tongue side facing the wall and continues working left to right, simply dropping and locking the planks into the previous row. In*Step is designed in large format luxury vinyl plank to allow for coverage of large areas in a short time.




Installation Steps

- 1. Identify tongue based on image above and start with tongue side facing the wall.
- 2. Work left to right, engaging In*Step in the end joints of the first row.
- 3. For subsequent rows, first engage the long side seam at a slight angle, then rotate the plank down into the locked position.
- 4. Use a tapping block and scrap piece of flooring to tighten seams as needed.

Construction

Quiet Cover is a revolutionary floating luxury vinyl plank that installs quickly, reducing the time and costs associated with traditional glue down LVT. Made from 72% recycled content, Quiet Cover is constructed with our patented In*Step tongue and groove system and an innovative silencing layer that reduces noise transfer. The wide plank format enhances each wood pattern, and unique embossing replicates the look of natural hardwood.




- ExoGuard™ Quartz Enhanced Urethane
- 2. Wear layer
- 3. Decorative design layer
- 4. Sound absorption sheet
- 5. Reinforced glass layer
- 6. Core board
- 7. Balancing back layer

Collection
































To order samples, please call
1.800.241.2073
or visit our website at
www.shawhardsurface.com

Product Specifications

i roddot opodinodtiono	
Style Name	Quiet Cover
Style Number	0186V
Construction	Luxury Vinyl Plank with In*Step™ Locking System
Class/ASTM F 1700	Class III Printed Film Vinyl Plank Type B (embossed)
Wear Layer Thickness	20 mil or 0.020" (0.5 mm)
Overall Thickness	5 mm or nominal 13/64"
Nominal Dimensions	7" wide, 48" long
Actual Size	
Width:	7.28" or 185 mm
Length:	47.10" or 1196 mm
Backing Class	Commercial Grade
Finish	ExoGuard™
Edge Profile	Micro Bevel
Added Antimicrobial	Yes, FlorSept
Installation	Floating
Recommended Adhesive	*None required, not recommended
Packaging	
Square Feet per Carton	19.27 sf
Pieces per Carton	8 pcs
Weight per Carton	33.70 lbs
Cartons per Pallet	55 cartons
Pallets per Truckload	20 pallets or 1100 cartons
Testing	
Sound Rating / ASTM E 492	IIC 56 when tested over 6" concrete with ceiling plenum
Slip Resistance / ASTM D 2047	ADA compliant
Residual Indentation / (modified) ASTM F 970	1000 psi
Flexibility / ASTM F 137	Passes
Resistance to Heat / ASTM F 1514	Passes
Resistance to Light / ASTM F 1515	Passes
Resistance to Chemicals / ASTM F 925	Passes
Radiant Flux / ASTM 648	>0.45 watts/cm ² , NFPA Class I
Smoke Density / ASTM E 662	Passes, < 450
Warranty	10 year limited commercial wear warranty
Environmental	
Recycled Content	
Post-consumer	39%
Pre-consumer	33%
Indoor Air Quality	FloorScore® certified
LEED Scoreboard	MR4, IEQ4.3

