



ProGen™



WATERPROOF



EASE OF
MAINTENANCE



DURABILITY



EASY TO INSTALL



ACOUSTICS



NO TEMPERATURE
LIMITS

Designed
for Life


 **Tarkett**



The beauty of better engineering.

ProGen™ is a radical leap forward in flooring technology – a rigid core surface engineered from the inside, out – designed to outperform the rigors of daily wear. It holds up beautifully to the demands of busy, active households – from kids and pets to water and dirt. ProGen also handles sunlight and extreme temperature changes, resisting buckling, denting and warping.

With beautiful, authentic-looking designs, an easy, no-mess installation, and guaranteed long-term wear, ProGen promises a better experience every step of the way.

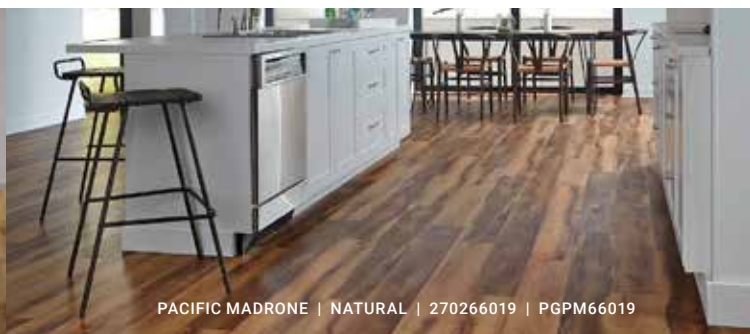

WATERPROOF



EASE OF MAINTENANCE



DURABILITY



EASY TO INSTALL



ACOUSTICS



NO TEMPERATURE LIMITS

Thermal Stability

Use in any room in the home. ProGen is designed to handle wide temperature fluctuations from windows and sunlight.

Easy Installation

Its easy Uniclic® system is faster than traditional installation systems, saving you time and money.

Durable

Resists the stresses of modern life from children to high heels to heavy furniture.

Waterproof

Safe to use in kitchens and bathrooms for a modern look throughout the home.

Rigid Core

Overcomes subfloor imperfections, unlike traditional luxury vinyl tile.

Quiet

IIC rating of 68 means superior sound absorption to drastically improve overall comfort.

ProGen's next-generation technology is designed to stand up to the demands of modern life—and whatever is thrown, dropped, spilled or scraped on it. Because ProGen is durable, waterproof, dimensionally stable, and easy to install, it can be used in any room—including all-season rooms with extreme temperature changes and rooms that are most prone to moisture and spills, like kitchens and baths.



New, Trend-Setting Designs

Make your design visions a reality through a variety of on-trend designs.



Realistic Embossing




Modern Painted Bevels




Installation

| Floating Floor | Quick and Simple Angle-Angle Click |
|--|--|
| Above/At/ Below Grade | ✓ |
| No Acclimation | ✓ |
| 90 Lineal Feet without a Transition | ✓ |
| 3-Seasons Room | ✓ |
| No Temperature Limitations | ✓ |
| Acoustic Rating | Total IIC of 68 (6" Concrete Slab + Suspended Ceiling) |

Dimensional Stability and Durability

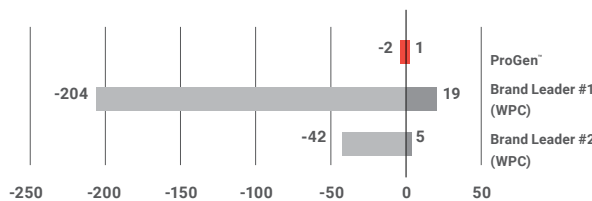

Contraction and Expansion in Mil
(ASTM F2199)

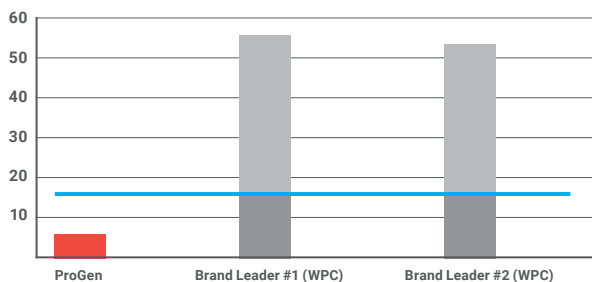

Residual Indentation
(ASTM F1914 0.178" @ 140 lbs.)



Durham Pine | Sun-Toned
270264014 | PGDP64014



Red Oak | Ginger
270264016 | PGR064016



Rock Maple | Medio
270264012 | PGRM64012



Durham Pine | Tavern
270264013 | PGDP64013



Stained Maple | Carmine
270264015 | PGSM64015



Vista Oak | Limed Natural
270265015 | PGVO65015



Cerused Oak | Powder
270265013 | PGCO65013



Stokes Range | Relic
270265018 | PGSR65018



Tannin Walnut | Gris
270265016 | PGTW65016



Cerused Oak | Denim
270265014 | PGCO65014



Aurora Oak | Starry Night
270265020 | PGA065020



Brushed Pine | Sorrel
270265019 | PGBP65019



Stokes Range | Dusk
270265017 | PGSR65017



West Oak | Drift
270266024 | PGWO66024



West Oak | Loft
270266022 | PGWO66022



West Oak | Natural
270266021 | PGWO66021



Spicebark Hickory | Fumed
270266016 | PGSH66016



Pacific Madrone | Natural
270266019 | PGPM66019



Spicebark Hickory | Comino
270266017 | PGSH66017



West Oak | Mountane
270266023 | PGWO66023




North Shore Pine | Cascade
270266020 | PGNS66020




Milled Oak | Copper
270266018 | PGM066018


Matching Accessories:




T-Mold



Universal Reducer



Stair Nose



Flush Mount Stair Nose



SPECIFICATIONS

| | | | |
|--------------------------------------|--------------------------------------|---------------|---------------|
| Total Thickness | 5 mm | | |
| ProGen Core™ Technology | 4 mm | | |
| Acoustical Backing | 1 mm | | |
| Wear Layer | 20 mils | | |
| Material | Phthalate Free, 100% Virgin Material | | |
| Reusable Content | 100% Reclaimable | | |
| Plank Size | 5" x 48" | 7" x 48" | 7" x 60" |
| Sq. Ft. per Carton | 26.68 sq. ft. | 28.52 sq. ft. | 29.61 sq. ft. |
| Planks per Carton | 16 | 12 | 10 |
| Cartons per Pallet | 56 | 50 | 40 |
| Lbs. per Carton | 42 lbs. | 44 lbs. | 45 lbs. |
| ASTM F2199 (Dimensional Stability) | Passes | | |
| ASTM F1914 (Residual Indentation) | Passes (PSI Equivalent > 5,000 lbs.) | | |
| ASTM F1514 (Heat Stability) | Passes | | |
| ASTM F1515 (Light Stability) | Passes | | |
| ASTM E2179 (Impact Sound Reductions) | Δ IIC \geq 21 dB | | |
| IIC Impact Sound Reduction Rating | 68 | | |
| ASTM F925 (Resistance to Chemicals) | Passes | | |
| ASTM D5116 (VOC Requirements) | Passes < 0.1 mg/m ³ | | |
| Scratch/Scuff/Abrasion Properties | Excellent | | |
| Phillips Castor Chair @ 100 lbs. | Passes @ 25,000 cycles | | |
| Installation System | Uniclic® (Angle-Angle) | | |
| Certification | FloorScore® Certification | | |
| Residential Warranty | Lifetime | | |
| Light Commercial Warranty | 15-Year | | |
| 3-Seasons Warranty | 10-Year | | |



Tarkett North America

30000 Aurora Road
 Solon, OH 44139
 USA: 1-877-TARKETT (1-877-827-5388)
 Canada: 1-877-436-6267

www.tarkettna.com

ON THE FRONT COVER:
 NORTH SHORE PINE | CASCADE | 270266020 | PGNS66020

©Tarkett USA Inc. 01/2019
 Printed in USA
 27015700020