

USER MANUAL

**HDMI V2.0 SWITCH 7x1
(Plastic Casing)**

Enjoy the vivid world!

INTRODUCTION


7x1 HDMI Switch:

The 7x1 HDMI switch allows 7 HDMI ports to be switched to a single display terminal via remote control or buttons on unit. This HDMI Switch support video formats including 720p, 1080i , 1080p, 4K/30HZ, 4K/60HZ.

FEATURES

- | Support 6Gbps data rate for tmds clock up to 600MHz
- | Support HDMI 2.0b
- | Support 3D
- | Supports highest video resolution 4K/60Hz
- | Support 24/30/36 bit deep color
- | Support input up to 8 metres AWG26 HDMI standard cable length, output up to 8metres
AWG26 cable length(4K/30Hz and lower resolution)
- | Support input up to 3 metres 2.0 HDMI standard cable length, output up to 5metres
2.0 HDMI cable length(4K/60Hz resolution)
- | Supports single high definition display for multiple sources, such as DVD Players
and HD players, PS4, Set Top Boxes
- | Need DC5V/1A power supply

Product Picture:

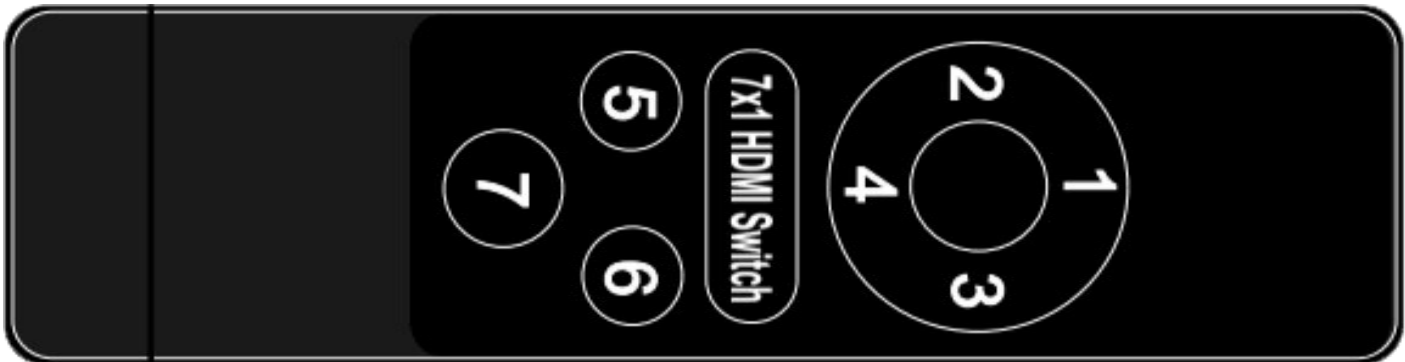

SPECIFICATIONS:

HDMI version	HDMI 2.0b
HDMI resolution	up to 4K/60Hz
Support video color format	3D video format
Support video color format	24/30/36 bit deep color
Support audio format.....	DTS-HD/Dolby-trueHD/DTS/Dolby-AC3/DSD
Max bandwidth.....	600MHz
Max baud rate.....	6Gbps
Input cable distance.....	≤8m AWG26 HDMI standard cable for 4K/30HZ; ≤3m 2.0 HDMI standard cable for 4K/60HZ
Output cable distance.....	≤8m AWG26 HDMI standard cable for 4K/30HZ; ≤5m 2.0 HDMI standard cable for 4K/60HZ
Max working current.....	650mA
Power adapter format..Input:	AC (50HZ, 60HZ) 100V-240V; Output: DC5V/1A
Operating Temperature range.....	(-10 to +55℃)
Dimension (L x W x H)	230x78x22 (mm)
Weight.....	220g

Operating and Connecting

- 1: Connect 7 HDMI cables from HDMI source device into HDMI switch input.
- 2: Connect 1 HDMI cable from HDMI source device into HDMI switch output.
- 3: Connect 5V/1A power adapter to the HDMI switch .

The Package includes

1. HDMI Switch
2. IR Remote Control
3. 5V DC Power Supply
4. User Manual