

Fill the ink system with ink
www.EchoStore.com

Filling the ink system

When you are installing the cartridges, leave the ink tanks lower or the same level and do not take the colorful plugs and caps out of the ink tanks. After you complete the installation of the ink system, plug the air filters. The ink tanks should be at the same level as your printer. If the ink tanks are higher than your printer, ink will flow out of the cartridges and go into your printer.

Do not forget to plug the air filters into the air holes, if you do not do that, air could not go into the ink tanks and ink will not go to your cartridges.


If you do not use the continuous ink system for more than a week, it is better to remove the air filters and plug the color caps back. If it is more than 1 month, it is better to seal the cartridges so that the cartridges will not be dry.

Do not get the chips wet or they will be damaged.

If there are air bubbles in the tubes, please let the printer fill the cartridges (the air filters must be plugged before you do this), and run several clean cycles, then the air will be removed.

If your printer does not recognize the cartridges, please take the cartridges out, then re-install them. Sometimes the cartridges (chips) do not contact well with the printer.

1. Take the rubber plugs out of the ink tanks.

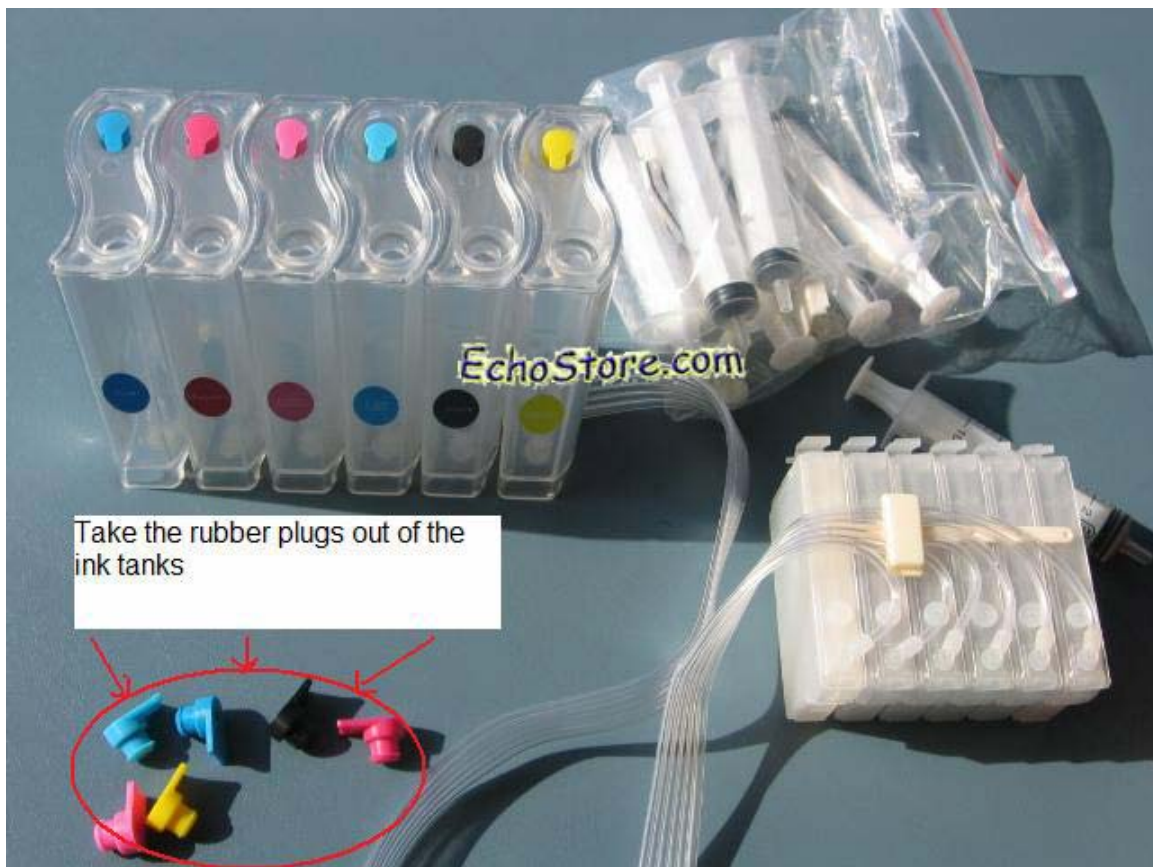

Fill the ink system with ink
www.EchoStore.com

Fill the ink system with ink
www.EchoStore.com

2. Use the syringe to draw ink fro, the ink bottles



Fill the ink system with ink
www.EchoStore.com

Fill the ink system with ink
www.EchoStore.com

3. Add ink into the ink tanks.



Fill the ink system with ink
www.EchoStore.com

Fill the ink system with ink
www.EchoStore.com


4. Take the transparent plug out of the cartridge, then the ink will flow into the cartridge.



Fill the ink system with ink
www.EchoStore.com

Fill the ink system with ink
www.EchoStore.com

5. When the cartridge is full, put the plug back. Please be careful so that the ink will not be out of the cartridge.

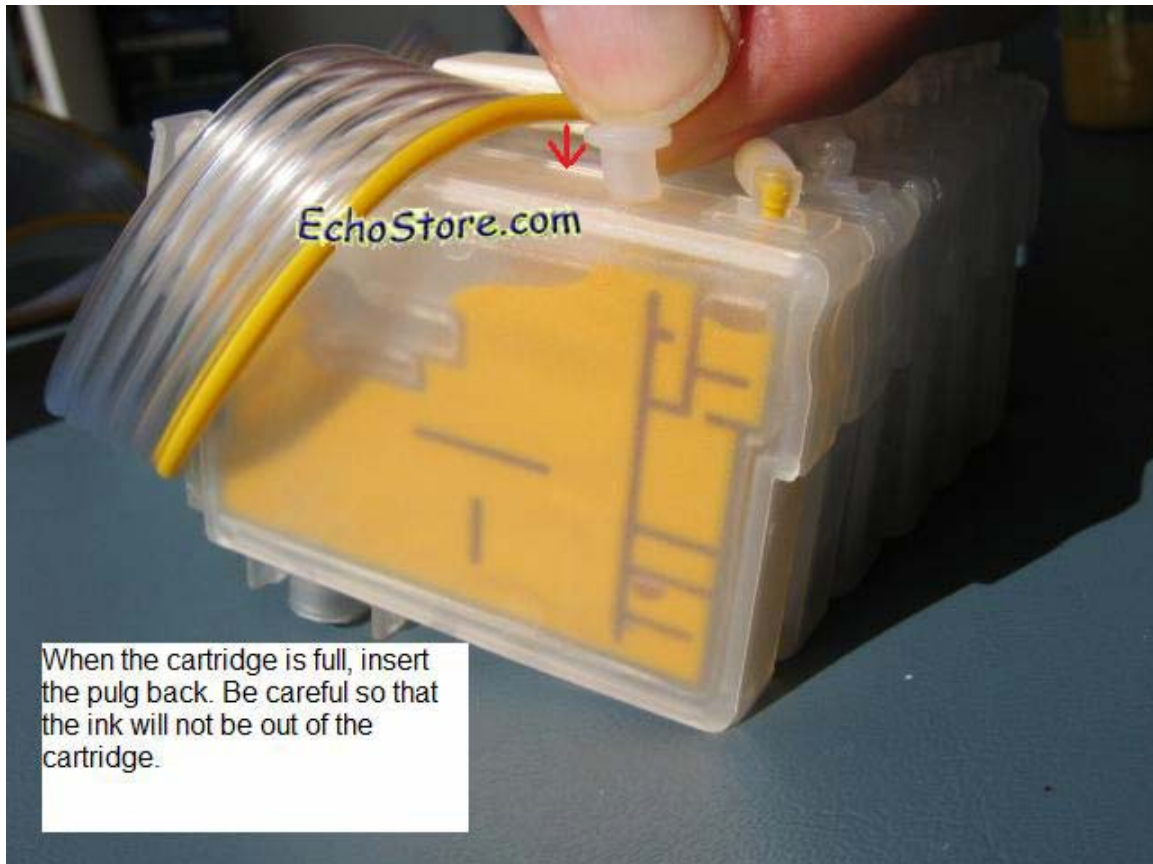

When the cartridge is full, insert the plug back. Be careful so that the ink will not be out of the cartridge.

Fill the ink system with ink
www.EchoStore.com

Fill the ink system with ink
www.EchoStore.com

6. If you want the ink flow into the cartridge faster, then leave the ink tanks at a higher position.

Add more ink into the ink tank. When it is full, plug the rubber back.


7. When you fill the other ink tanks and cartridges, In order to see if the cartridges are full, please separate the cartridges.



Fill the ink system with ink
www.EchoStore.com

Fill the ink system with ink
www.EchoStore.com

8. Check if the cartridge is full.

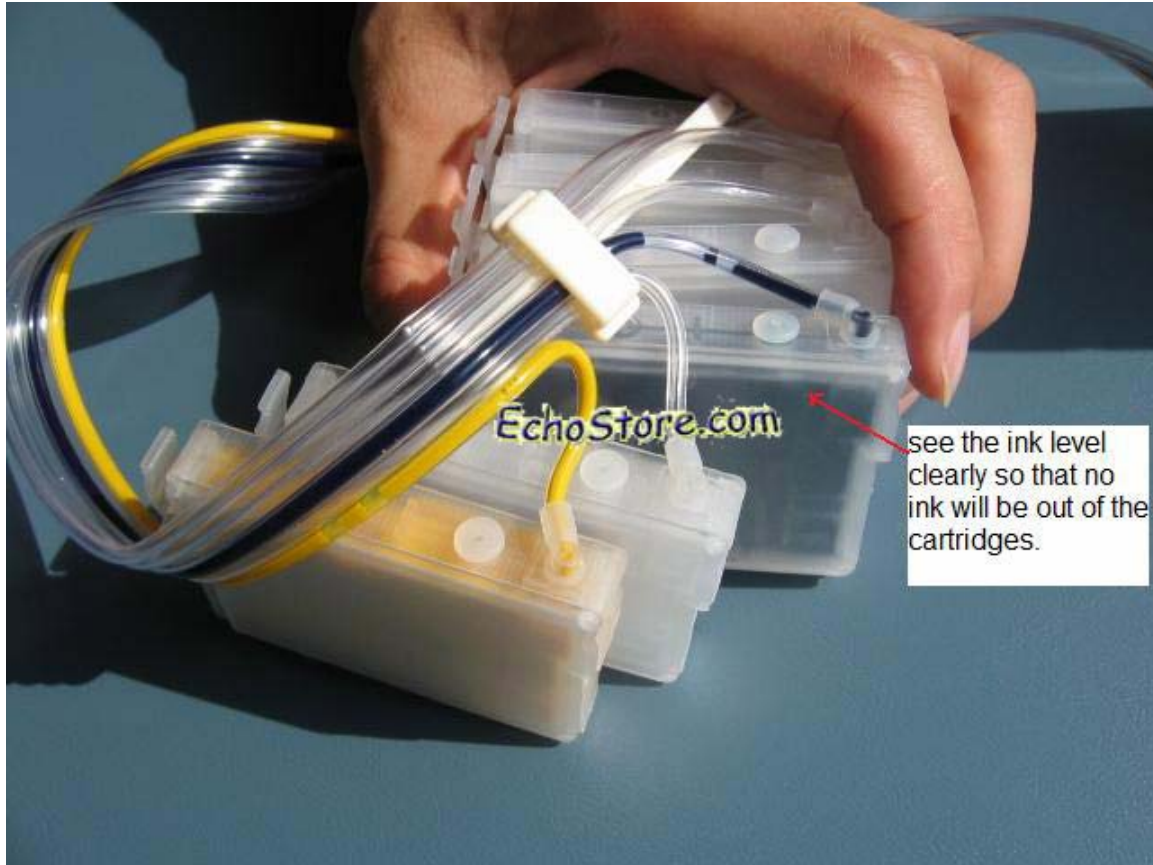

9. Please repeat 1-6, then you can fill the ink system completely.

Fill the ink system with ink
www.EchoStore.com