




G-334
Replacement Link

- Forged Steel - Quenched and Tempered.
- Has larger inside dimensions making it easier to attach hooks or other fittings to the chain.
- An exclusive Crosby product.
- After making connections, rivets must be peened.

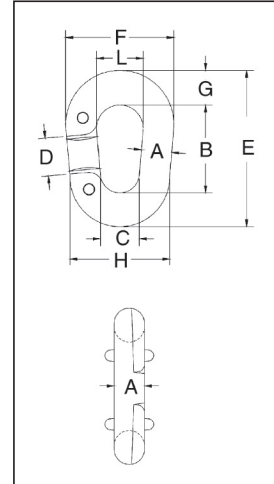

G-334 Pear Shape “Missing Link”® Replacement Links


Chain Size (in.)	Stock No. G-334 Galv.	Working Load Limit (lbs.)*	Weight Per 100 (lbs.)	Dimensions (in.)								
				A	B	C	D	E	F	G	H	L
3/8	1013432	1850	25.00	.41	2.00	.56	.81	2.94	1.63	.47	1.38	.81
1/2	1013450	3300	50.00	.50	2.50	.69	1.00	3.63	2.00	.56	1.69	1.00
5/8	1013478	5000	75.00	.63	2.75	.81	1.06	4.00	2.38	.63	2.06	1.13
3/4	1013496	7100	125.00	.75	3.13	1.00	1.13	4.75	2.75	.81	2.50	1.25
7/8	1013511	9600	200.00	.88	3.69	1.25	1.38	5.56	3.25	.94	3.00	1.50

* Ultimate Load is 4 times the Working Load Limit. ** Rivets Only - No interlocking lugs. † Has reinforced rivet holes. All sizes have countersunk rivet holes.
Not Suitable for use with Grade 80 or Grade 100 chain and chain slings used in overhead lifting.



G-335
Replacement Link

- Forged Steel - Quenched and Tempered.
- Integral rivets join the two halves.
- After making connections, rivets must be peened.

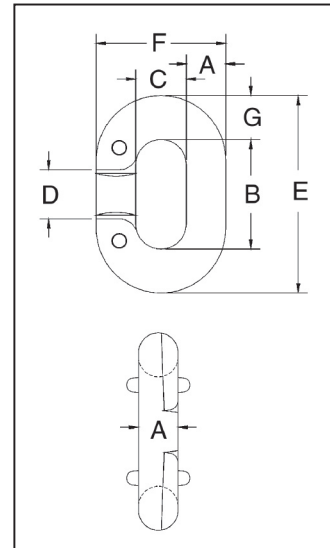

Meets or exceeds the performance requirements of Federal Specifications RRC-27ID, Type II, except for those provisions required of the contractor. For additional information, see page 452.

G-335 “Missing Link”® Replacement Links

Chain Size (in.)	Stock No. G-335 Galv.	Working Load Limit (lbs.)*	Links Per Box	Weight Per 100 (lbs.)	Dimensions (in.)						
					A	B	C	D	E	F	G
**1/4	1013110	1325	10	6.25	.28	.88	.44	.44	1.50	1.00	.31
**5/16	1013138	1950	10	12.50	.34	.94	.47	.47	1.69	1.16	.38
3/8	1013156	2750	10	20.00	.41	1.13	.56	.56	2.06	1.38	.47
7/16	1013174	3625	10	27.50	.47	1.28	.59	.59	2.34	1.53	.53
1/2	1013192	4750	10	37.50	.53	1.47	.66	.66	2.66	1.72	.59
5/8	1013236	7250	10	72.50	.66	1.81	.78	.81	3.31	2.09	.75
3/4	1013254	10250	10	122.50	.78	2.13	.94	1.06	3.88	2.50	.88
7/8	1013272	12000	Bulk	175.00	.91	2.50	1.13	1.13	4.50	2.94	1.00
† 1	1013290	15500	Bulk	250.00	1.03	2.75	1.25	1.25	5.00	3.31	1.13

* Ultimate Load is 4 times the Working Load Limit. ** Rivets Only - No interlocking lugs. † Has reinforced rivet holes. All sizes have countersunk rivet holes.
Not Suitable for use with Grade 80 or Grade 100 chain and chain slings used in overhead lifting.

WESTECH RIGGING SUPPLY
Call Toll Free: 800-442-7475

Call Us or Visit Our Stores:
Monday - Friday, 8:00am - 5:30pm Pacific



Distributed By

Visit Us Online at: www.WestechRigging.com

4140 West 11th Avenue
Eugene, Oregon 97402

2439 McGilchrist St SE
Salem, Oregon 97302