


Roller Bearing Wire Rope Sheaves without Inner Race

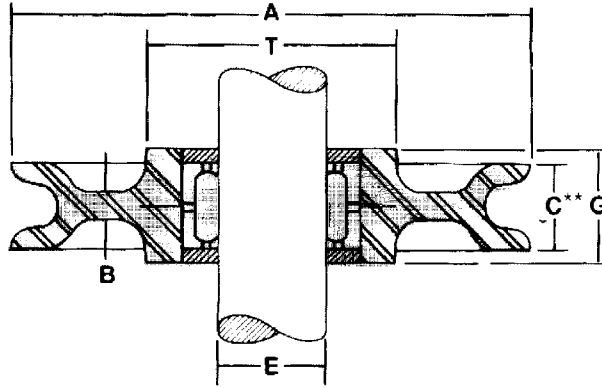

To order, please specify:

- Nominal Sheave O.D.
- Model Number
- Wire Rope Size

Forgefab will furnish sheaves to specified wire rope size within the minimum and maximum wire rope size indicated, at no additional charge.

Roller Bearing Wire Rope Sheaves without Inner Race

A Nominal O.D.	Model Number	Material *	Weight lbs	Wire Rope Size		E Shaft Size	G Hub Width	T Hub O.D.	Web Thickness
				Minimum	Maximum				
4-1/4	HFWR	D.I.	4.2	1/4	3/4	1.0000	1.505	1.810	-
4-1/4	HFMR	D.I.	2	1 MR	1-1/4 MR	.999	1.500	1.688	-
4-1/2	4-3C	D.I.	3.3	1/4	3/4	1.0000	1.560	2.000	-
6	6-3C	D.I.	4.8	1/4	3/4	1.0000	1.562	2.750	-
8	8-3C	D.I.	6.0	1/4	3/4	1.0000	1.562	2.500	-
10	10-10C	D.I.	21.0	5/16	1	2.0000	1.750	4.000	-
10	10-10D	D.I.	22.0	3/8	7/8	2.5000	2.010	4.000	-
12	12-3C	D.I.	17.8	3/8	1/2	1.0000	1.560	3.190	-
12	12-10C	D.I.	27.0	5/16	1	2.0000	1.750	4.500	-
12	12-10D	D.I.	27.0	3/8	7/8	2.5000	2.010	4.500	-
14	14-10C	F.F.	32.1	3/8	1-1/8	2.0000	1.750	4.500	-
14	14-10D	F.F.	33.5	3/8	1-1/8	2.0000	2.010	4.500	-
16	16-10C	F.F.	50.0	3/8	1-1/8	2.5000	2.010	4.750	.750
16	16-25C	F.F.	59.0	1/2	1-1/8	3.0000	2.500	4.750	.750
16	16-25D	F.F.	51.2	1/2	1	3.5000	2.500	5.470	.750
18	18-10D	F.F.	62.0	9/16	7/8	2.5000	2.010	4.750	.750
18	18-25C	F.F.	59.0	1/2	1-1/8	3.0000	2.500	4.750	.750
18	18-25D	F.F.	74.0	1/2	1-1/8	3.5000	2.500	6.500	.750
18	18-250C	F.F.	68.1	5/8	1-1/8	4.5000	2.765	7.530	.750
18	18-250D	F.F.	72.0	5/8	1	5.0000	2.750	8.530	.750
20	20-25C	F.F.	75.0	9/16	1-1/8	3.0000	2.500	4.750	.750
20	20-25D	F.F.	76.0	9/16	1-1/8	3.5000	2.500	5.500	.750
20	20-250C	F.F.	81	1/2	1-1/8	4.499	2.750	7.500	.750
20	20-250D	F.F.	85.0	5/8	1-1/8	4.5000	2.765	7.500	.750
24	24-25C	F.F.	106.0	3/4	1-1/8	3.0000	2.500	4.750	.750

Roller Bearing Wire Rope Sheaves without Inner Race (continued)

A Nominal O.D.	Model Number	Material *	Weight lbs	Wire Rope Size		E Shaft Size	G Hub Width	T Hub O.D.	Web Thickness
				Minimum	Maximum				
24	24-25D	F.F.	131.0	9/16	1-1/8	3.5000	2.505	5.500	.750
24	24-250C	F.F.	136.0	3/4	1-1/8	4.5000	2.765	7.500	.750
24	24-250D	F.F.	146.0	1/2	1-3/8	5.0000	2.750	8.500	.750
26	26-250C	F.F.	124.0	7/8	1-1/8	4.5000	2.765	7.500	.750
26	26-250D	F.F.	133.0	3/4	1	5.0000	2.750	8.530	.750
30	30-250C	F.F.	209.0	1	1-3/8	4.5000	2.765	7.500	1.000
30	30-250D	F.F.	209.0	1	1-3/8	5.0000	2.750	8.500	1.000
34	34-250C	F.F.	249.0	1-1/8	1-1/4	4.5000	2.767	7.500	1.000
34	34-250D	F.F.	270.0	1-1/8	1-3/8	4.999	2.750	8.500	1.000