





POLYESTER STAGE SLINGS

These lightweight roundslings are ideal for easy and inconspicuous suspension of stage sound and lighting equipment. Black sleeve material helps sling blend into the surroundings. *Lift-All* stage slings include the *Tuflex* features and benefits except that the color coding of the slings is achieved by using a color-coded identification tag. Double-wall sleeve material is standard.

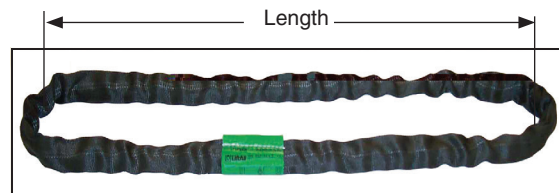

Part Number	Rated Capacity (lbs.)*			Minimum Length (ft.)	Approximate Measurements			
	Vertical 	Choker 	Basket 		Weight (lbs. / ft.)	Body Diameter Relaxed (in.)	Width at Load (in.)	Minimum Hardware Diameter (in.)
BSEN30	2,600	2,100	5,200	1-1/2	.2	5/8	1-1/8	7/16
BSEN60	5,300	4,200	10,600	1-1/2	.3	7/8	1-1/2	5/8
BSEN90	8,400	6,700	16,800	3	.4	1-1/8	1-7/8	3/4

Round Slings

TUFLEX WIDE-LIFT

Wide Load Support and Balance

Tuflex wide-lift slings distribute the load over a wide area and offer better balance of larger loads - whether heavy or light.

Features and Benefits

Maintains all the basic *Tuflex* features plus ...

Promotes Safety

- Wide body distributes load over wide area and offers improved stability.

Saves Money

- Bearing point of eyes can be shifted to prolong sling life.
- Custom sizes available to fit your needs.





Saves Time

- Standard eye length is 12", making hook-up easy and fast.
- Standard body width is 12", making load balancing easier.

Note:
Wide-lift slings should only be used in basket hitch.

Consult *Lift-All* for special requirements.



Code	Color of Eyes	Vertical Basket Hitch Rated Capacity* (lbs.)
WL30	Purple 	5,200
WL60	Green 	10,600
WL90	Yellow 	16,800
WL120	Tan 	21,200

*

WARNING

Do not exceed rated capacities. Sling capacity decreases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the Effect of Angle chart in the HELP section of this catalog.