

AG & UTILITY, TRAILER SAFETY & WINCH LINE TAIL CHAIN



Trailer Chain Class 4 & Above

Class 4 - All types of trailers with a GVWR of over 5,000 lbs (2,270 kg) and not to exceed 10,000 lbs (4,540 kg) GVWR. Two chains must be used per trailer.


Stock #	Trade Size (Inches)	Length (inches)	Hooks	Qty. Per Drum	Lbs. Per Drum	GVWR	
						Lbs.	Kgs.
8607006	8/0 (0.342)	30	1 (S-Hook)	100	300	7,600	3,447
8604229	8/0 (0.342)	36	1 (S-Hook)	100	375	7,600	3,447
6807902	8/0 (0.342)	30	1 (w/Latch)	100	300	7,600	3,447
8607260	8/0 (0.342)	36	1 (w/Latch)	100	360	7,600	3,447
8607903	5/16 G30	36	1 Clevis Slip Hook & Latch	100	310	7,600	3,447
6800028*	1/4 G70	36	1 Clevis Slip Hook & Latch	250	590	12,600	5,714
8605734*	3/8 G43	36	1 Clevis Slip Hook & Latch	50	250	16,200	7,348
6800026*	3/8 G70	36	1 Clevis Slip Hook & Latch	100	515	26,400	11,975

*Not defined per SAE J684

Ag Trailer Chain

Peerless Ag chains meet the requirements of ANSI/ASAE Standard S338.5. All chains come with latch-type grab hooks, which ensure that the chain will not separate from the towing vehicle. A permanent ID tag states the gross vehicle pounds for which the chain is intended.

Stock #		Trade Size (Inches)	Length (inches)	Qty. Per Pkg.	Lbs. Per Pkg.	System Strength	
Zinc	Clevis Link					Lbs.	Kgs.
8607193	---	1/4	59	50	220	6,400	2,900
8607187	8612424	5/16	59	50	305	10,000	4,535
8607224	---	5/16	60	50	355	16,000	7,250
8607189	8612486	3/8	59	25	225	20,000	9,070
8607191	8612535	7/16	64	20	280	30,000	13,600
8607225	---	1/2	70	20	340	40,000	18,140
8607195	---	5/8	107	1	37	60,000	27,215

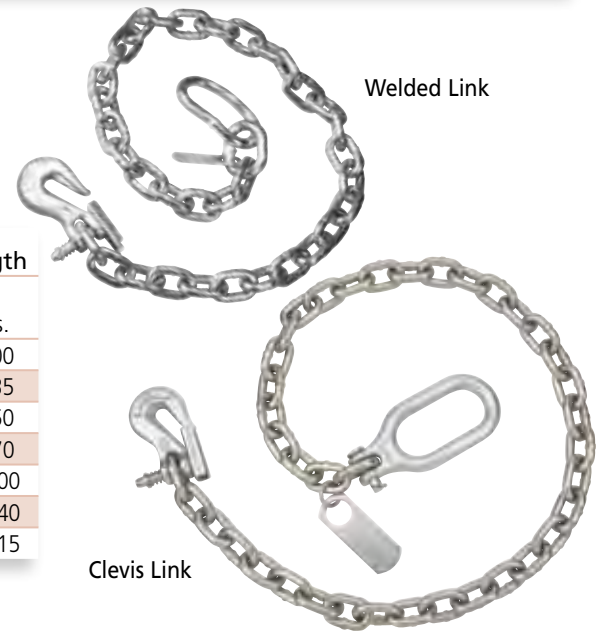

Welded Link

Clevis Link

Winch Line Tail Chain

Flexible attachment for use with wire rope. Length specified is exclusive of hook. Use same size chains as wire rope. The hook is dropped forged alloy steel and heat treated for extra durability. The hook is designed to prevent wear on wire rope. Custom orders available upon requests. **NOT FOR OVERHEAD LIFTING**

Low Carbon

Stock #	Trade Size		Lgth.	No. of Links	Wire Rope Dia.	Lbs. Per Ea.	WLL.	
	In.	MM					Lbs.	Kgs.
574280818	1/2	13	18	11	5/16 - 3/8	8.6	9,200	4,172
574281018	5/8	16	18	8	1/2 - 5/8	9.8	13,000	5,896
574281218	3/4	19	18	6	3/4 - 7/8	15.0	20,200	9,161

Design Factor 3.5:1

Alloy

Stock #	Trade Size		Lgth.	No. of Links	Wire Rope Dia.	Lbs. Per Ea.	WLL.	
	In.	MM					Lbs.	Kgs.
574480818	1/2	13	18	8	5/16 - 3/8	6.8	12,000	5,442
574481018	5/8	16	18	7	1/2 - 5/8	8.9	18,100	8,209
574411218	3/4	19	18	6	3/4 - 7/8	15.5	28,300	12,834
574481424	7/8	22	24	8	1 - 1-1/8	22.2	34,200	15,510
574481624	1	26	24	6	1 - 1-1/8	24.0	47,700	21,633

Design Factor 3.5:1



Distributed By
WESTECH RIGGING SUPPLY

Visit Us Online at: www.WestechRigging.com

Call Us Toll Free at: 800-442-7475


Call Us or Visit Our Stores: Monday - Friday, 8:00am - 5:30pm Pacific

4140 West 11th Avenue

Eugene, Oregon 97402

2439 McGilchrist St SE

Salem, Oregon 97302

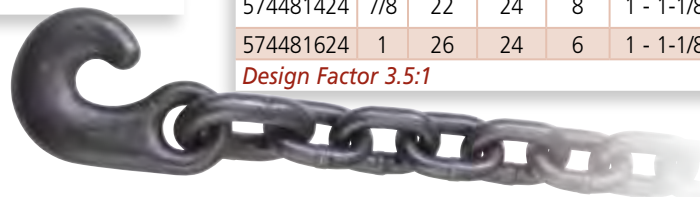

DO NOT EXCEED CAPACITY!
See the SAFETY GUIDELINES section before using these products. Pages 138-149.