

3 FESTOON GLIDERS

Festoon gliders are used to support flat cable along the runway and bridge, and they are standard on steel runways of 63 feet or less. No tools are required to attach the festooning to the gliders.




GORBEL[®]
A CLASS ABOVE

FESTOON GLIDER

TRACK SERIES	250 - 500	1000 - 4000
A Ø	1-1/4"	2"
F	3-1/4"	3-1/2"
WEIGHT	1#	1#

Recommended for use with flat cable on STEEL runways up to 63' maximum. Use *festoon trolleys* for runways greater than 63'. One required every 3' on bridge or 6' on runway. Maximum opening for festooning is 7/8" x 7/8". Gliders are not recommended for air hose or aluminum systems (use trolleys).

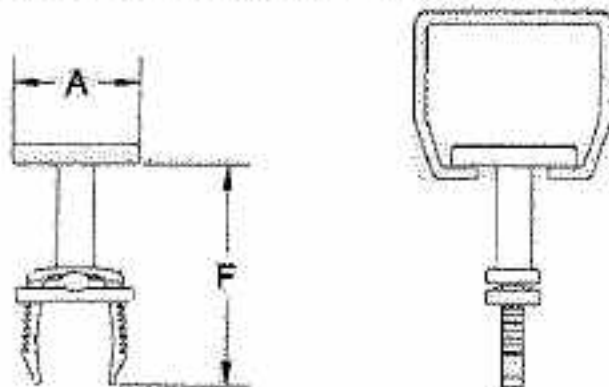

PART NUMBER: GLIDER.KIT - (fill in capacity)
Example: GLIDER.KIT - 500 is a glider for 500# track.

