

DTVGameControl

Timer Setup



This feature is supported in DTVGameControl and DTVGameControl Matrix

Timer Setup




The Timer feature records all DirecTV, Cable Box and Dish Network channels that are currently tuned. The Timer, will execute power on for all displays. If you are using the Matrix version - the Input/Output configuration will be recorded as well. Be sure to adjust, channels, Input/Output configuration, ect., before starting to set up the Timer feature.


Log into DTVGameControl as Admin and turn Edit Mode ON




Select Snap Shot

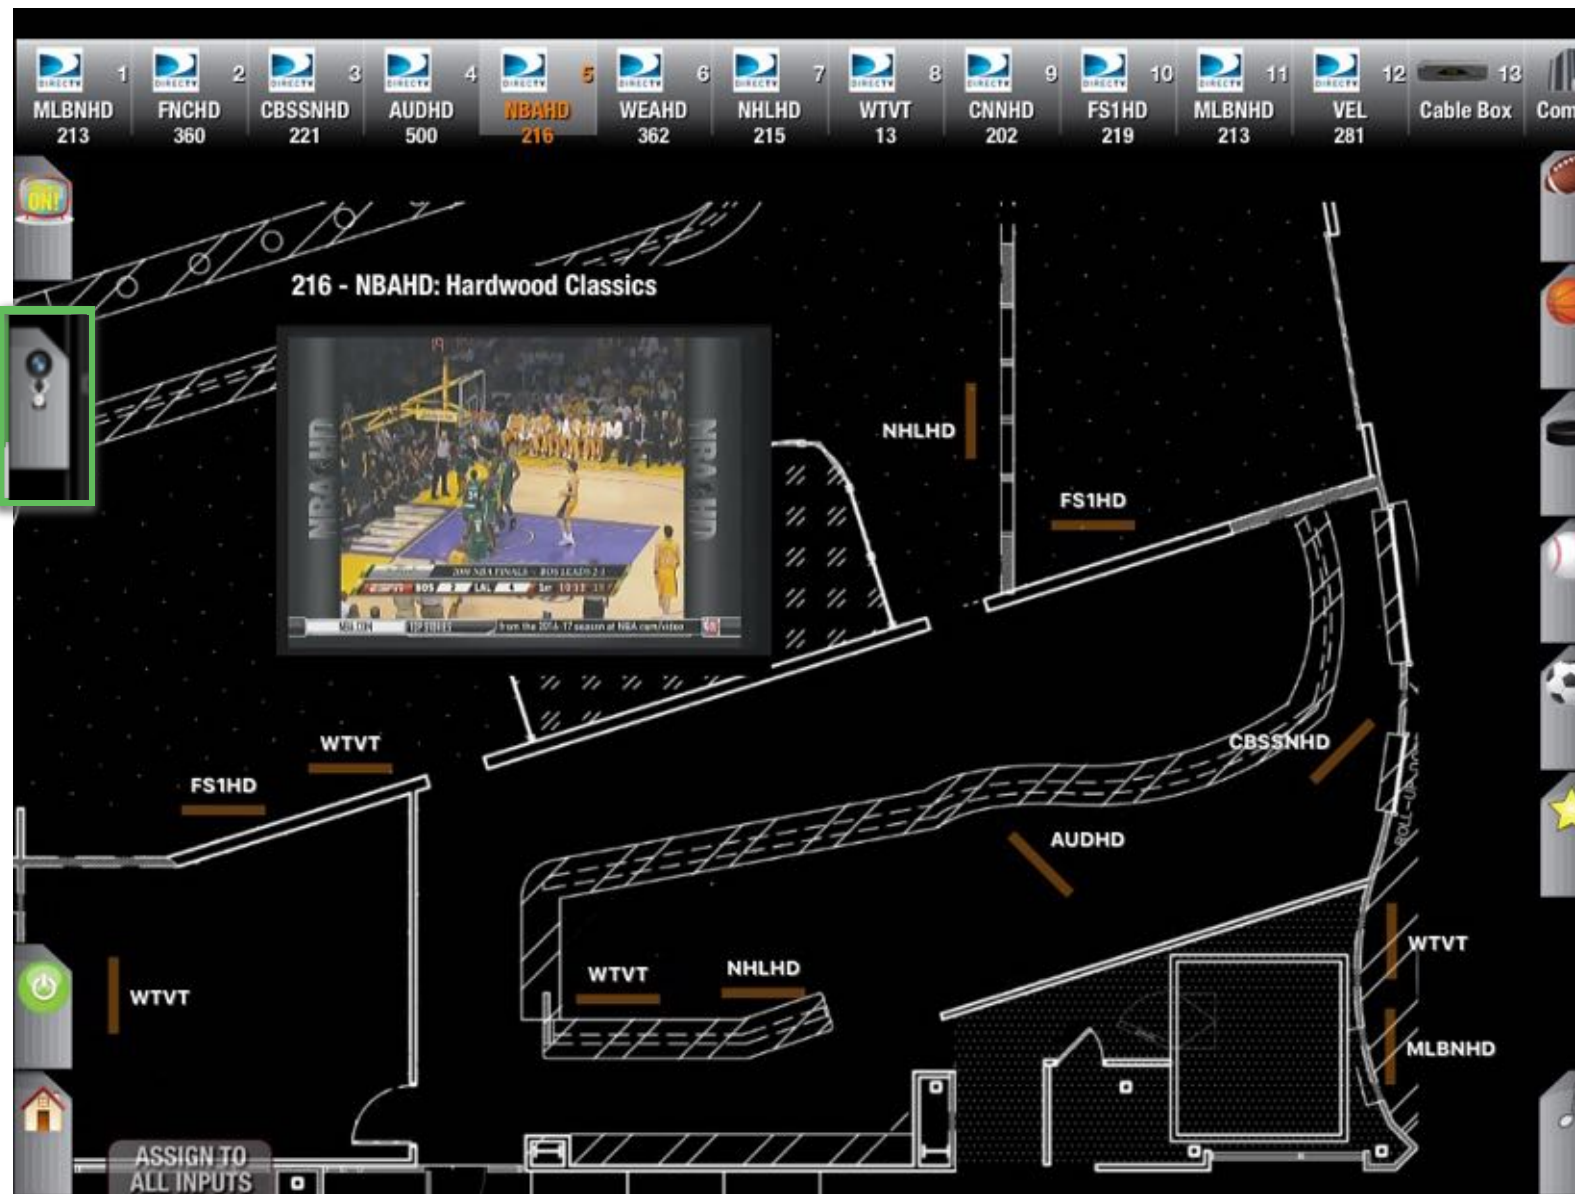


Timer Setting Window

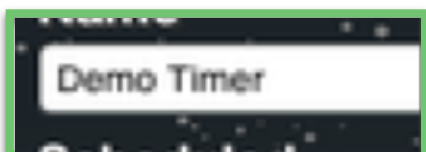

Name the Timer




Schedule ON will associate the Snap Shot with the set time

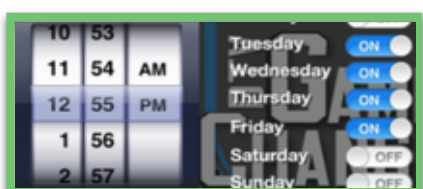

Set time and days for the timer to run



If set to On all TV power ON commands will execute

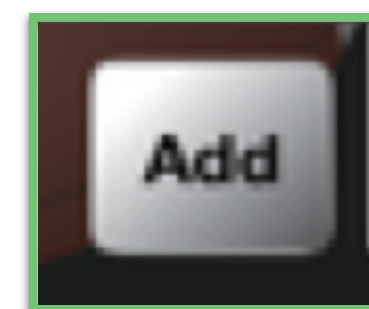

Select Add when complete



To delete a timer swip left on it

Timer Setup



Push Notifications Must be Allowed for DTVGameControl Timer events to work.

When testing a timer, allow 3 seconds per TV for the Timer feature to fully execute.

To test or manually execute a Timer

The screenshot shows the DTVGameControl interface with a central panel divided into 'Power Commands' and 'Schedule Commands'. The 'Power Commands' section includes 'All TVs On' and 'All TVs Off'. The 'Schedule Commands' section includes a 'Send' button and a timer entry 'Morning On Sched... 10:30 AM Sun Mon Tue...'. A green box highlights a power button icon on the left side of the screen, with a callout 'Select the Power Button'. Another green box highlights a 'Send' button in the top right corner, with a callout 'Press Send to execute'.