


American Dryseal Pipe Threads (NPTF and NPSM)

Actual Outside Diameter Of Male Pipe Threads

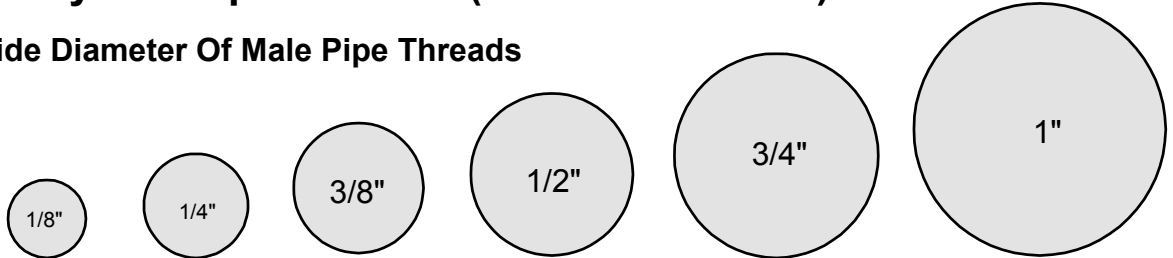


Simply Place Your Male Pipe Thread Over The Thread Profiles To Determine The Correct Size.


Pipe Size	1/8"	1/4"	3/8"	1/2"	3/4"	1"
Thread	1/8-27	1/4-18	3/8-18	1/2-14	3/4-14	1-11-1/2
O.D.	.41	.54	.68	.84	1.06	1.31
Size Code	2	4	6	8	12	16

Tubing

Actual Outside Diameter Of Tubing

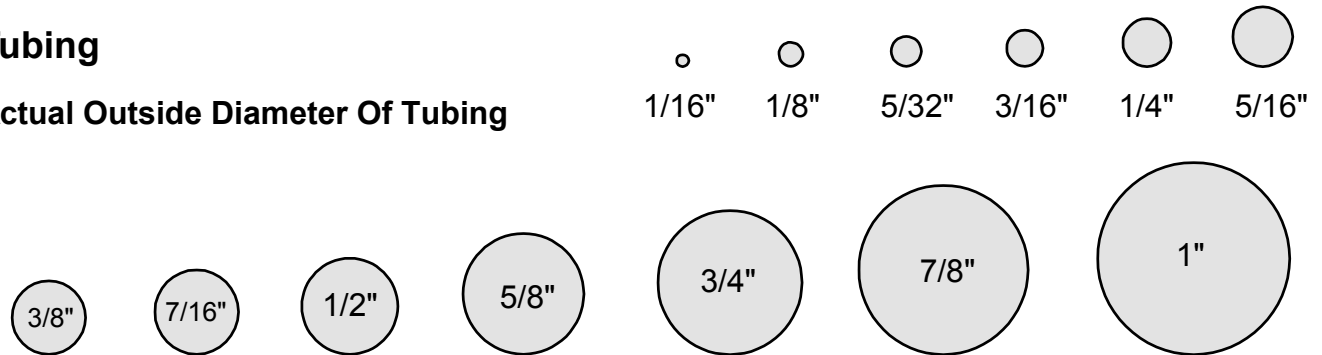


Simply Place Your Tubing Over The Tubing Profiles To Determine The Correct Size.

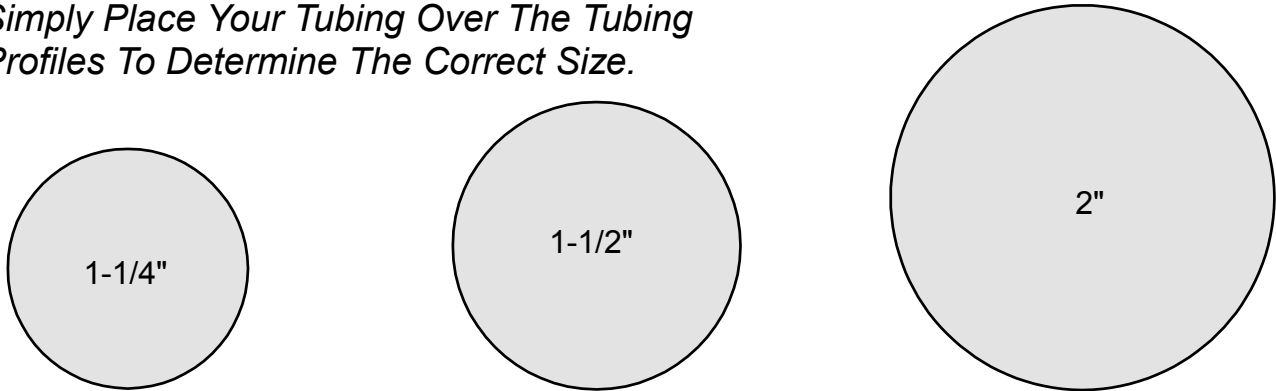

SAE J514, 37° Flare (JIC)

Actual Outside Diameter Of Male 37° Flare (JIC) Threads

Simply Place Your Male 37° Flare (JIC) Thread Over The Thread Profiles To Determine The Correct Size.

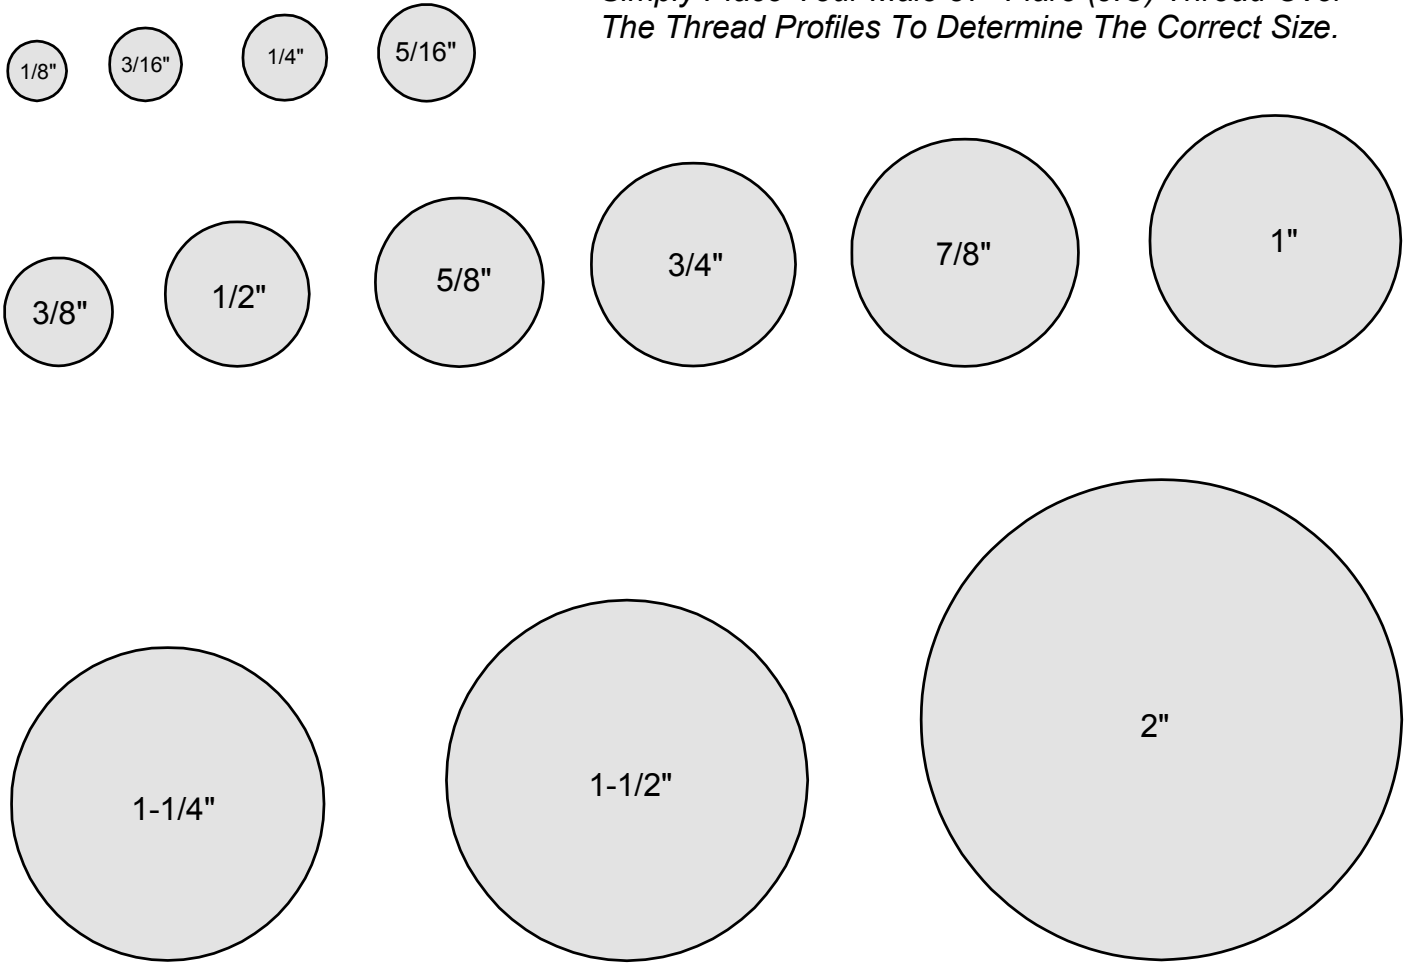


Inch	1/8"	3/16"	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"	1-1/2"	2"
Thread	5/16-24	3/8-24	7/16-20	1/2-20	9/16-18	3/4-16	7/8-14	1 1/16-12	1 3/16-12	1 5/16-12	1 5/8-12	1 7/8-12	2 1/2-12
O.D. (inches)	.31	.38	.44	.50	.56	.75	.88	1.06	1.18	1.31	1.63	1.88	2.50
Size	2	3	4	5	6	8	10	12	14	16	20	24	32

SAE J514, Straight Thread O-Ring Boss

Actual Outside Diameter Of Male O-Ring Boss Threads


Simply Place Your Male O-Ring Thread Over The Thread Profiles To Determine The Correct Size.

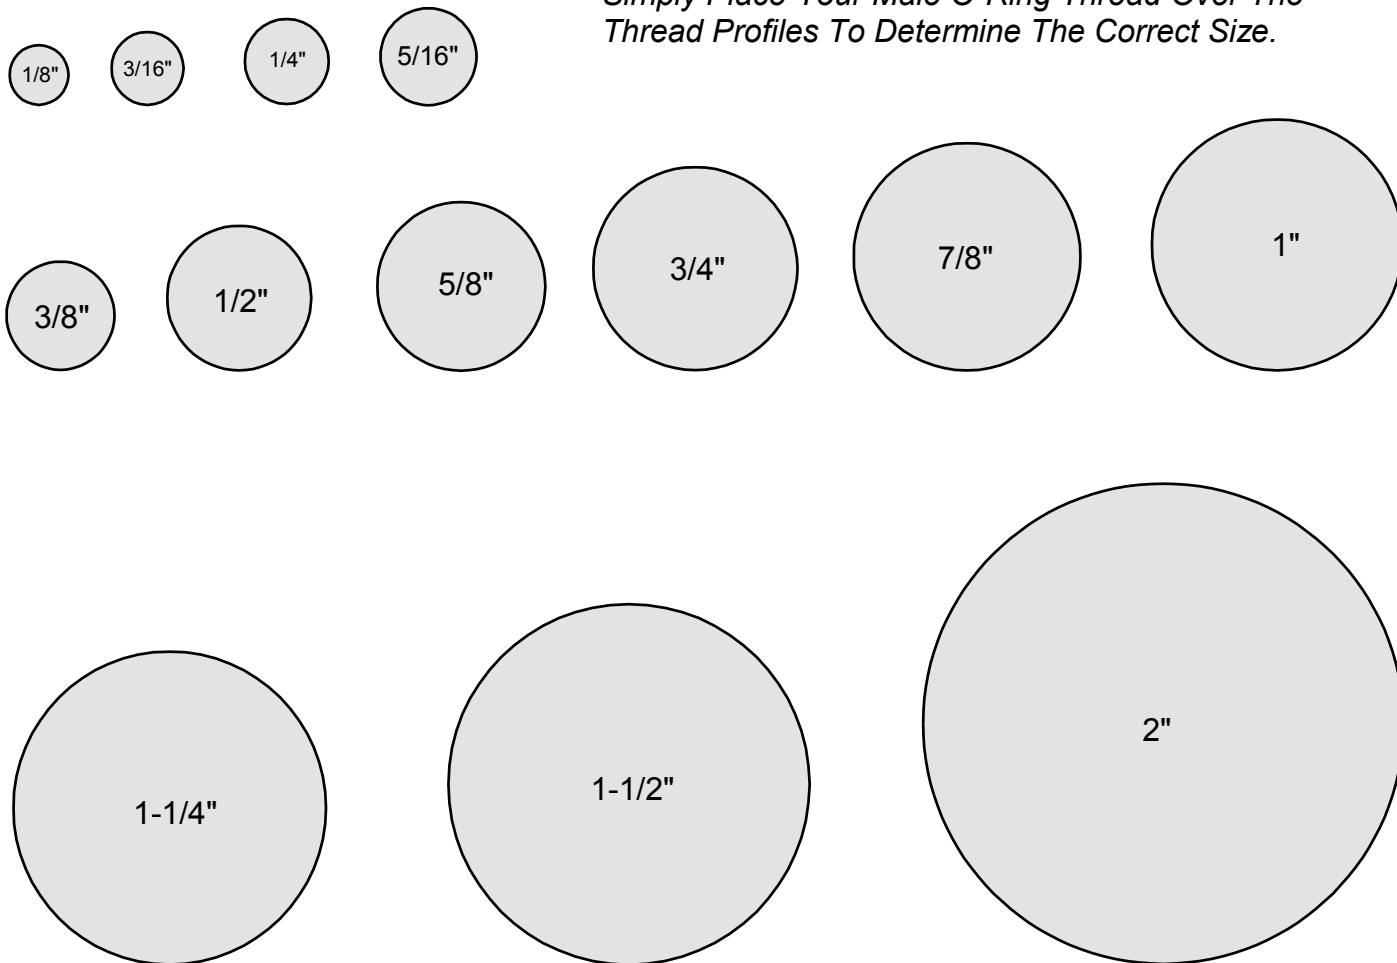

Inch	1/8"	3/16"	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"	1-1/2"	2"
Thread	5/16-24	3/8-24	7/16-20	1/2-20	9/16-18	3/4-16	7/8-14	1 1/16-12	1 3/16-12	1 5/16-12	1 5/8-12	1 7/8-12	2 1/2-12
O.D. (inches)	.31	.38	.44	.50	.56	.75	.88	1.06	1.18	1.31	1.63	1.88	2.50
Size	2	3	4	5	6	8	10	12	14	16	20	24	32

SAE J512, 45° Flare (SAE)

Actual Outside Diameter Of Male 45° Flare (SAE) Threads

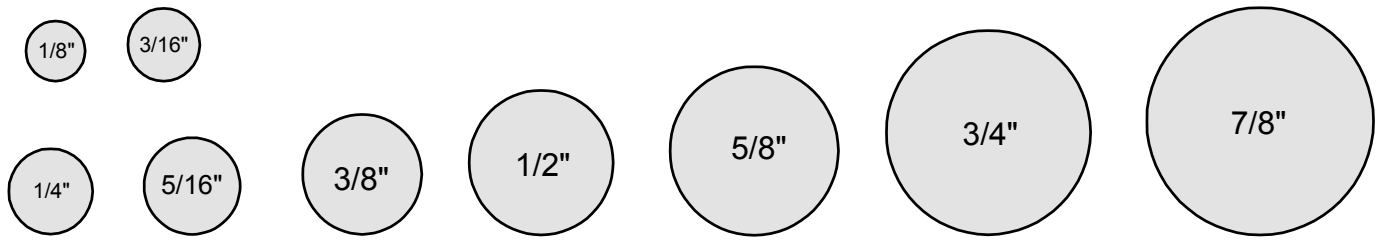


Inch	1/8"	3/16"	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	7/8"
Thread	5/16-24	3/8-24	7/16-20	1/2-20	5/8-18	3/4-16	7/8-14	1 1/16-14	1 3/16-12
O.D. (inches)	.31	.38	.44	.50	.56	.75	.88	1.06	1.18
Size	2	3	4	5	6	8	10	12	14






Simply Place Your Male 45° Flare (SAE) Thread Over The Thread Profiles To Determine The Correct Size.

SAE J1453 O-Ring Face Seal (OFS)

Actual Outside Diameter Of Male O-Ring Face Seal (OFS) Threads

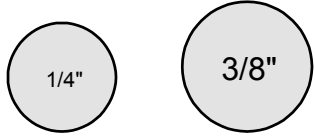

Simply Place Your Male O-Ring Face Seal (OFS) Thread Over The Thread Profiles To Determine The Correct Size.

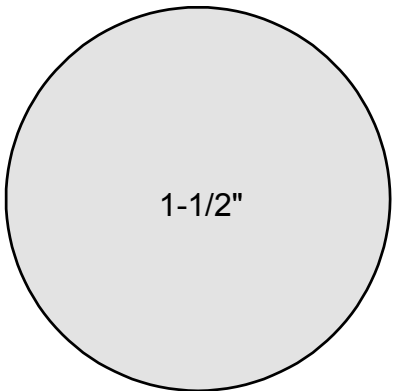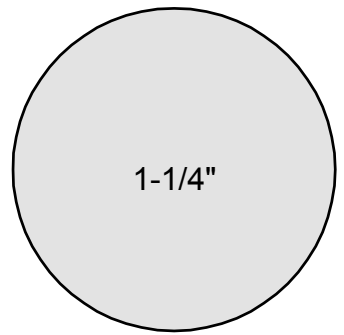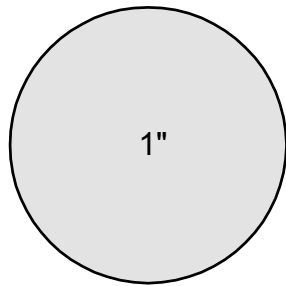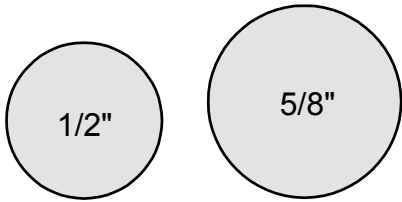

Inch	1/4"	3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"
Thread	9/16-18	11/16-16	13/16-16	1-14	1 13/16-12	1 7/16-12	1 11/16-12	2-12
O.D. (inches)	.56	.68	.81	1.00	1.18	1.44	1.68	2.00
Size	4	6	8	10	12	16	20	24