


**INSTALLATION INSTRUCTIONS**  
**High Clearance Forward A-Arms:**  
**for Can-Am Maverick**

Item	Description	Qty
A	Lower A-Arm, Driver	1
B	Lower A-Arm, Passenger	1
C	Zerk Fittings	4

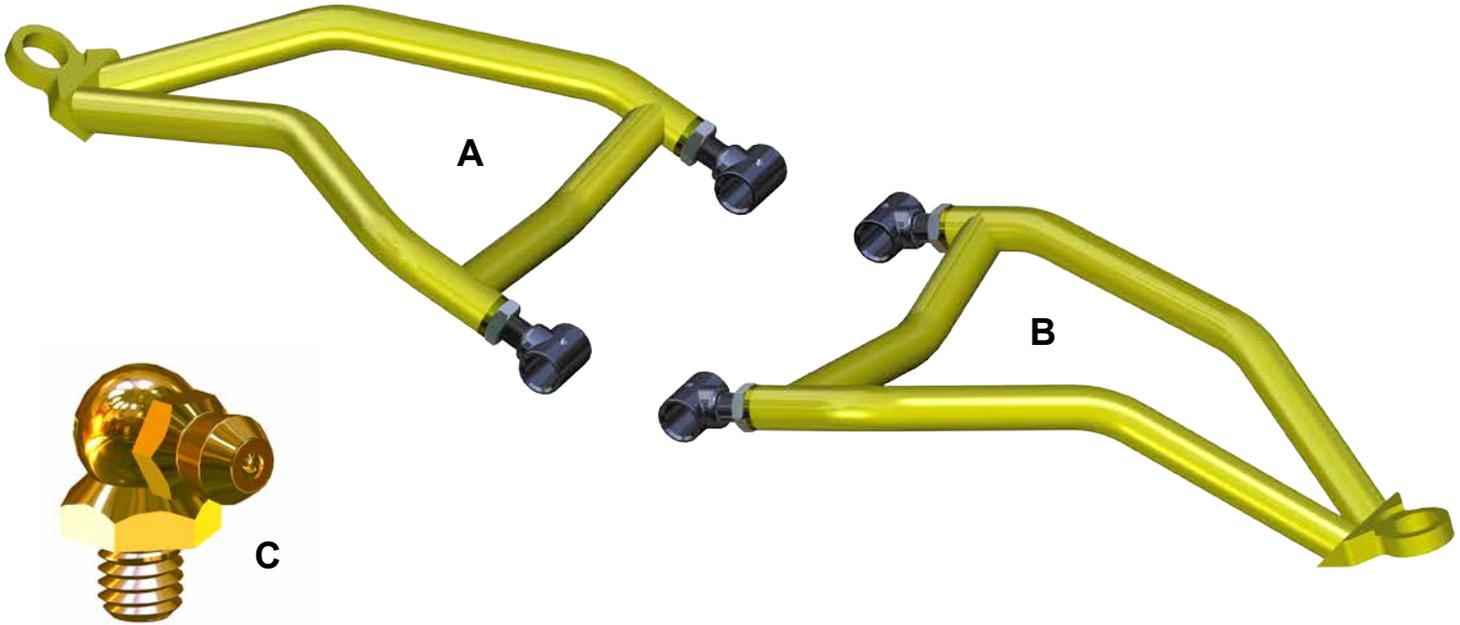

**Read instructions and view illustrations before beginning.**

**Need help with your installation?**

 [sales@superatv.com](mailto:sales@superatv.com)
 [www.superatv.com](http://www.superatv.com)

 1-812-574-7777
  8:00am - 9:00pm EST M-Th  
 8:00am - 7:00pm EST Friday  
 9:00am - 2:00pm EST Saturday

*Thank You*  
*For Choosing*  
**SUPERATV**.COM<sup>®</sup>

**Liability Statement**  
 SuperATV's<sup>®</sup> products are designed to best fit user's ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory or aftermarket parts will void any warranty provided by SuperATV<sup>®</sup> and is not recommended. SuperATV's<sup>®</sup> products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV<sup>®</sup> to verify that they will work together.

Although SuperATV<sup>®</sup> has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc. will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV<sup>®</sup> urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV<sup>®</sup> products, user agrees that should damages occur, SuperATV<sup>®</sup> will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV<sup>®</sup>, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV<sup>®</sup>. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.

SuperATV<sup>®</sup> will warranty only parts provided by SuperATV<sup>®</sup>. Any damage or problems with OEM housings, bearings, seals, or other manufacturers' products will not be covered by SuperATV<sup>®</sup>. SuperATV<sup>®</sup> parts and products are not warranted if item was not installed properly, misused, or modified.


Keep stock hardware for reuse.

1. Raise front of machine off ground remove Wheels and secure with jack stands.



*Do not tighten hardware completely unless noted.*

1. Install stock Ball Joints, Cushions, and Wear Plates or SuperATV p/n AAB-CA-002-MAV A-Arm Bushings into Lower A-Arms (A)(B). See Fig. 1.
  - Install Zerk Fittings (C) into Pivot Blocks. See Fig. 1.
  - For a reference point, set Pivot Blocks to 5/8" as shown in Fig. 1.
2. Install Lower A-Arms (A)(B) to Frame with stock hardware. See Fig. 2.
  - Install Lower A-Arms (A)(B) to Knuckles with stock hardware. See Fig. 3.
3. Tighten all hardware completely. Reinstall Wheels.
4. Check Toe of vehicle and adjust is necessary.

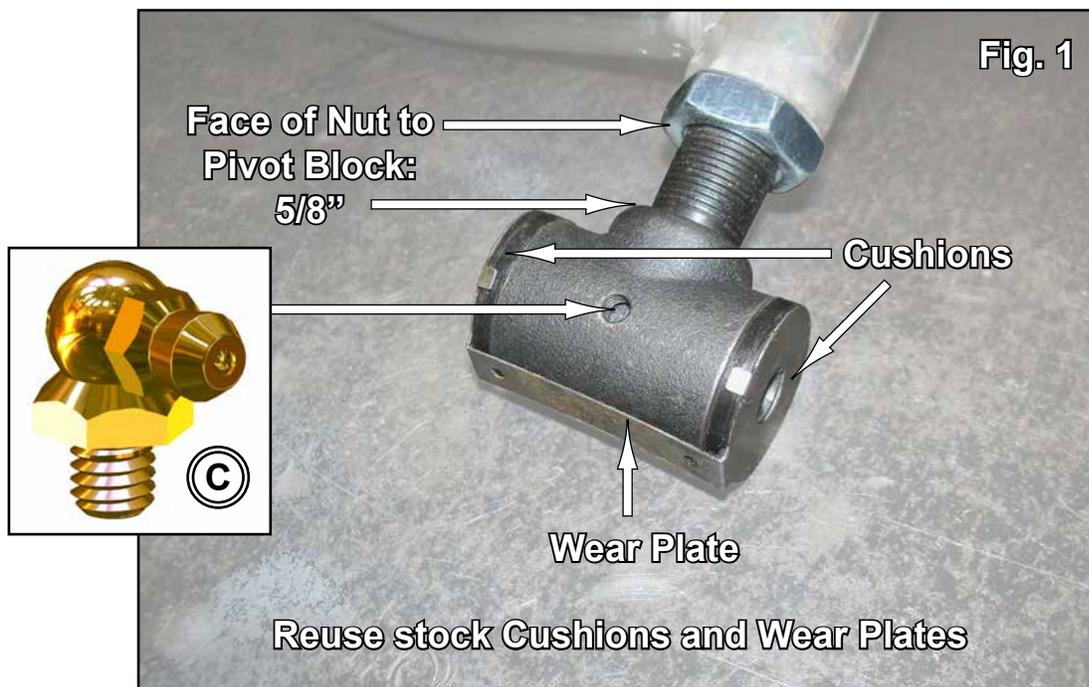

SuperATV recommends using Loc-Tite on Nuts when installing A-Arms to Frame.

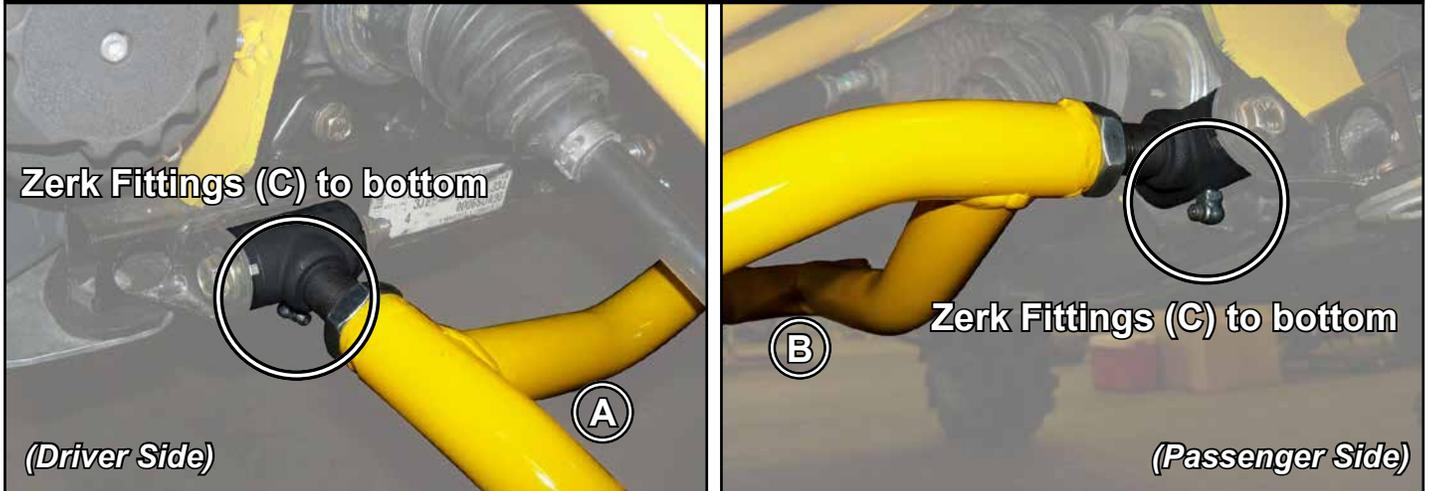


Fig. 2 - Install to Frame with stock hardware

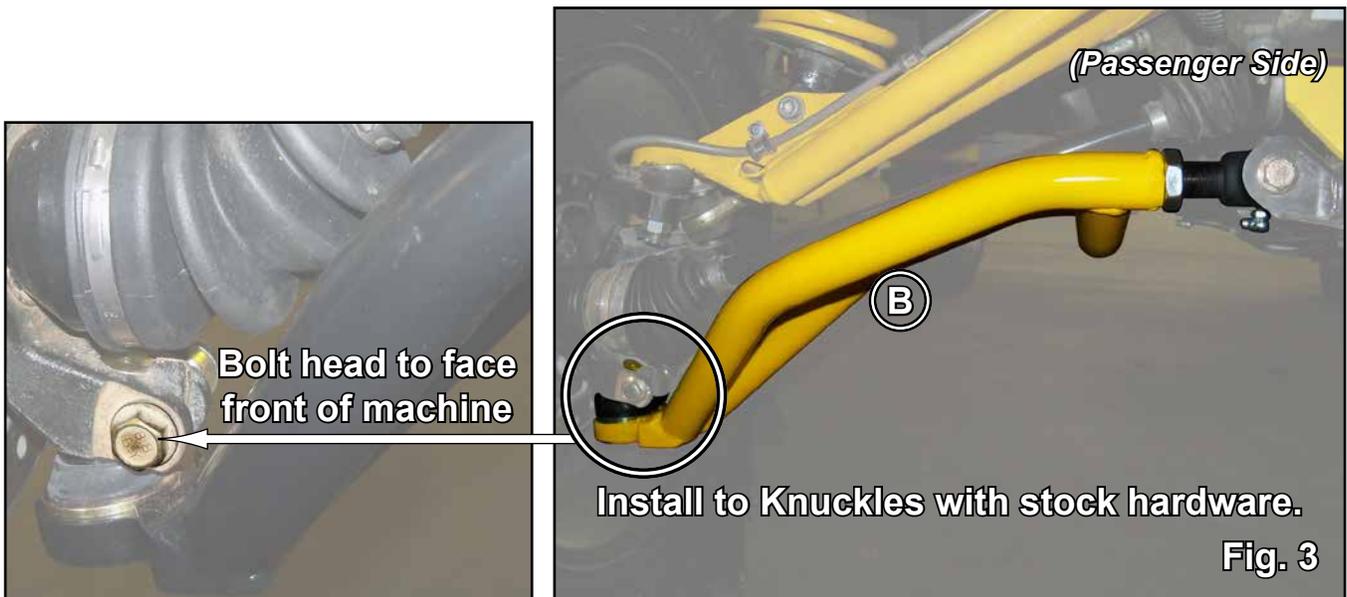


Fig. 3

