





**IPHNM10**

The IPHNM10 horizontal lifting clamps have a pretension feature that allows the user to attach the clamps to the material for horizontal lifting and transfer of non-sagging material. To be used where material surface must not be damaged. These clamps must be used in pairs or more.

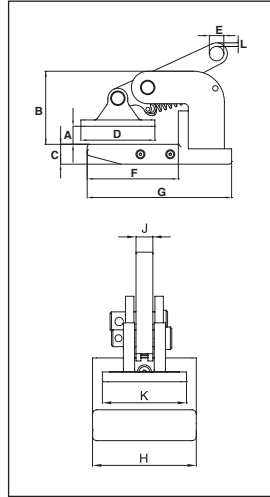

**IPH10**

The IPH10 horizontal lifting clamps with spring loaded tension have a pretension feature that allows the user to attach the clamps to the material for horizontal lifting and transfer of non-sagging material. These clamps must be used in pairs or more.

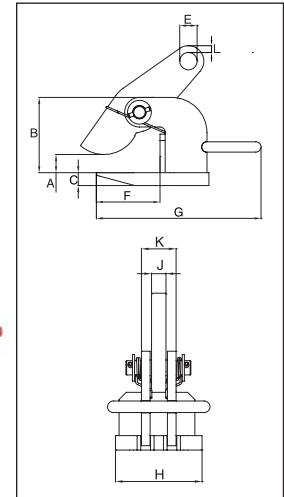

**For Horizontal Lift and Transfer with Pretension System**

- Available in capacities of .5 thru 12 metric tons.
- Jaw openings available: 0" to 4.75".
- Welded alloy steel body for strength and smaller size. Forged alloy components, where required.
- Individually Proof Tested to 2 times the Working Load Limit with certification.
- Company name (CrosbyIP), logo, Working Load Limit and jaw opening permanently stamped on body.
- Each product is individually serialized, with the serial number and Proof Load test date stamped on body. User manual with test certificate is included with each clamp.
- Maintenance and repair kits are available.
- Manufactured by an ISO 9001 facility.
- All sizes are **RFID EQUIPPED**.



**Load Rated**

**Model IPHNM10**

Model	Working Load Limit (Per Pair) (t)*	IPHNM10 Stock No.	Weight Each (lbs.)	Dimensions (in.)										
				Jaw A	B	C	D	E	F	G	H	J	K	L
IPHNM10	.5	2703287	8.00	0 - 0.81	3.19	0.87	3.23	0.63	3.98	6.30	2.91	0.47	2.36	0.16
IPHNM10	1	2703288	14.0	0 - 1.38	3.66	1.18	3.62	0.63	4.06	6.46	2.91	0.47	2.36	0.28
IPHNM10	2	2703290	32.0	0 - 1.18	5.47	1.18	5.16	0.87	6.54	9.65	3.94	0.79	2.91	0.35
IPHNM10J	2	2703291	34.0	1.19 - 2.38	6.65	1.18	5.16	0.87	6.54	9.65	3.94	0.79	2.91	0.35

\* Design Factor based on EN 13155 and ASME B30.20.

**Model IPH10 and IPH10J: With Spring Loaded Tension, Magnets and Handle**

Model	Working Load Limit (Per Pair) (t)*	IPH10 Stock No.	Weight Each (lbs.)	Dimensions (in.)										
				Jaw A	B	C	E	F	G	H	J	K	L	
IPH10	.5+	2703297	3.97	0 - 0.81	3.39	0.47	0.63	4.06	5.91	2.36	0.47	1.06	0.16	
IPH10	1+	2703298	5.50	0 - 1.38	3.94	0.63	0.63	4.06	5.91	2.36	0.47	1.22	0.28	
IPH10	2	2703522	24.3	0 - 2.38	4.61	0.63	0.87	4.29	10.08	4.33	0.79	1.57	0.35	
IPH10	3	2703523	33.1	0 - 2.38	4.61	0.79	1.02	4.29	10.47	4.72	0.79	1.89	0.43	
IPH10	4.5	2703524	46.3	0 - 2.38	5.20	0.98	1.18	4.09	11.02	5.12	0.79	1.89	0.47	
IPH10	6	2703525	57.3	0 - 2.38	5.63	0.98	1.42	4.84	12.60	5.12	0.79	1.89	0.55	
IPH10	9	2703526	81.6	0 - 2.38	6.18	1.18	1.69	5.24	12.99	5.51	0.98	2.44	0.63	
IPH10	12	2703527	94.8	0 - 2.38	6.77	1.18	1.85	5.55	13.90	5.91	0.98	2.44	0.67	
<b>With larger jaw opening #</b>														
IPH10J	3	2703533	38.0	2.38 - 4.75	6.97	0.79	1.02	4.29	10.47	4.72	0.79	1.89	0.35	
IPH10J	4.5	2703534	52.0	2.38 - 4.75	7.56	0.98	1.18	4.09	11.02	5.12	0.79	1.89	0.43	
IPH10J	6	2703535	66.0	2.38 - 4.75	7.99	0.98	1.42	4.84	12.60	5.12	0.79	1.89	0.47	
IPH10J	9	2703536	90.0	2.38 - 4.75	8.54	1.18	1.69	5.24	12.99	5.51	0.98	2.44	0.55	
IPH10J	12	2703537	90.0	2.38 - 4.75	9.13	1.18	1.85	5.55	13.90	5.91	0.98	2.44	0.63	

\* Design Factor based on EN 13155 and ASME B30.20. + No handle or magnets. # Larger Working Load Limits available.

