

UB500 Series Non Swiveling Overhaul Balls



All sizes are RFID EQUIPPED



Key to McKissick® UB500 Utility Overhaul Ball Model Number				
MB	4	T	35	E
↓	↓	↓	↓	↓
McKissick® Utility Overhead Ball	Working Load Limit (Tons)	Swivel Style T = Top NS = Non	Ball Only Weight	Hook Style E = 320 or 320N S = SHUR-LOC® Eye Hook



S320
Eye Hook



S1316 A
SHUR-LOC®
Eye Hook



Both styles available with optional McKissick® Wedge Socket Assembly or S-421 **TERMINATOR** Wedge Socket



UWO 422T
TERMINATOR
Wedge Only

- Sizes 4 Tons through 15 Tons available with Crosby's S1316A "Positive Locking" SHUR-LOC® hook which may be used for lifting personnel. Meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).
- Design Factor 4:1.
- Each ball can be equipped with the new McKissick® US-422T Wedge Socket which can be easily adjusted to fit various sizes of Wireline by changing the wedge (Ensure that correct wedge is used for selected Wireline size).
- All hooks used on UB500 Overhaul Balls (S320, S320N & S1316A) are forged from alloy steel. The S320 and S320N hooks come complete with latches.
- The S320 hook (PL latch) and the S320N hook (S4320 latch), with the proper latch attached, may be used for personnel lifting when secured with proper device (Bolt, nut and pin for the PL latch; Cotter pin for the S4320 latch). Meets the intent of OSHA Rule 1926.1431(g)(1)(i)(A) and 1926.1501(g)(4)(iv)(B).

Overhaul Ball Assembly

Optional US-422T Wedge Sockets

McKissick® UB500 Model No.	UB500 "E" Eye Hook Stock No.	UB500 "S" SHUR-LOC® Stock No.	Working Load Limit (Tons)	Weight Each (lbs.)	Wireline Size (in.)	Model No.	Wedge Socket Assy. Stock No.	Weight Each (lbs.)	Wedge Only Stock No.	Weight Each (lbs.)
MB4NS35	1036402*	1036407	4	54	3/8 7/16 1/2 1/2	US4T US4T US4T US5T	1044300 1044309 1044318 1044327	4.6 4.6 4.6 8.5	1047310 1047301 1047329 1047338	0.6 0.6 0.6 1.0
MB4NS85	1036411*	1036416	4	98						
MB4NS150	1036420*	1036425	4	158						
MB4NS200	1036429*	1036434	4	200						
MS7NS85	1036438*	1036443	7	104	9/16	US5T	1044336	8.5	1047347	1.0
MB7NS150	1036447*	1036452	7	165	5/8	US5T	1044345	8.5	1047356	1.0
MB7NS200	1036456*	1036461	7	205	5/8	US6T	1044354	9.4	1047365	1.4
MB7NS285	1036465*	1036470	7	316	3/4	US6T	1044363	9.4	1047374	1.4
MB10NS150	1036474*	1036479	10	198	5/8 3/4 7/8 1	US6T US6T US8T US8T	1044354 1044363 1044404 1044417	9.4 9.4 20.8 20.8	1047365 1047374 1047425 1047431	1.4 1.4 7.6 8.6
MB10NS200	1036483*	1036488	10	242						
MB10NS285	1036492*	1036497	10	347						
MB10NS350	1036501*	1036506	10	385						
MB10NS650	1036510*	1036511	10	700	1-1/8	US10T	1044426	46.5	1047440	12.5
MB12NS150	1036519*	-	12	198	1-1/4	US10T	1044435	46.5	1047459	15.0
MB12NS200	1036528*	-	12	240	5/8 3/4 7/8 1	US8AT US8AT US8T US8T	1044372 1044381 1044404 1044417	17.5 17.5 20.8 20.8	1047383 1047392 1047425 1047431	4.3 4.8 7.6 8.6
MB12NS285	1036537*	-	12	347						
MB12NS350	1036546*	-	12	385						
MB12NS650	1036555*	-	12	700						
MB15NS200	1036564*	-	15	267	1-1/8	US10T	1044426	46.5	1047440	12.5
MB15NS350	1036573*	-	15	425	1-1/4	US10T	1044435	46.5	1047459	15.0
MB15NS650	1036582*	-	15	722	5/8 3/4 7/8 1	US8T US8T	1044417 1044426	20.8 20.8	1047431 1047440	8.6 12.5
MB15NS1150	1036591*	-	15	1280						


* Utilizes Crosby "N" style hooks with integrated latch. Replacement latch kit is S-4320. PL latch and S-4055 latch will not fit.



UB-500 NON SWIVEL OVERHAUL BALLS




All sizes are RFID EQUIPPED.

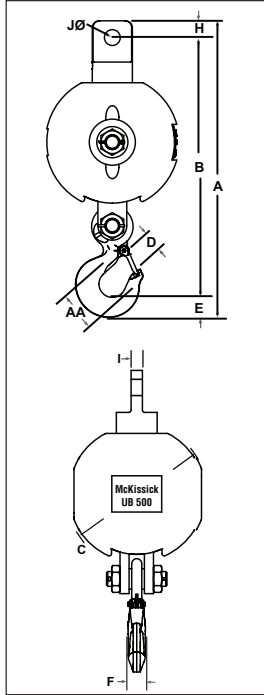

UB-500NS Non Swivel Overhaul Balls with 320N Eye Hooks

Model No.	UB-500 "E" Stock No.	Dimensions (in.)									
		A	B	C	D	E	F	H	I	J	AA
MB4NS35	1036402	20.09	17.27	7.5	1.36	1.44	1.12	1.38	0.75	1.31	2.5
MB4NS85	1036411	20.98	18.16	9.25	1.36	1.44	1.12	1.38	0.75	1.31	2.5
MB4NS150	1036420	21.98	19.16	11.25	1.36	1.44	1.12	1.38	0.75	1.31	2.5
MB4NS200	1036429	22.35	19.53	12.5	1.36	1.44	1.12	1.38	0.75	1.31	2.5
MB7NS85	1036438	23.18	20.36	9.25	1.61	1.81	1.38	1.38	0.75	1.31	3.0
MB7NS150	1036447	24.56	21.36	11.25	1.61	1.81	1.38	1.38	0.75	1.31	3.0
MB7NS200	1036456	24.89	21.71	12.5	1.61	1.81	1.38	1.38	0.75	1.31	3.0
MB7NS285	1036465	25.86	22.67	13.88	1.61	1.81	1.38	1.38	0.75	1.31	3.0
MB10NS150	1036474	31.44	27.19	11.25	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB10NS200	1036483	31.81	27.56	12.5	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB10NS285	1036492	32.75	28.5	13.88	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB10NS350	1036501	33.31	29.06	15.00	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB10NS650	1036510	34.79	30.54	17.94	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB12NS150	1036519	31.44	27.19	11.25	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB12NS200	1036528	31.81	27.56	12.5	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB12NS285	1036537	32.75	28.5	13.88	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB12NS350	1036546	33.31	29.06	15.00	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB12NS650	1036555	35.79	30.54	17.94	2.08	2.25	1.62	2.00	1.25	1.78	4.0
MB15NS200	1036564	37.59	32.59	12.5	3.02	3.00	2.38	2.00	1.25	1.78	5.0
MB15NS350	1036573	38.81	33.81	15.00	3.02	3.00	2.38	2.00	1.25	1.78	5.0
MB15NS650	1036582	40.22	35.22	17.94	3.02	3.00	2.38	2.00	1.25	1.78	5.0
MB15NS1150	1036591	42.22	37.22	21.62	3.02	3.00	2.38	2.00	1.25	1.78	5.0

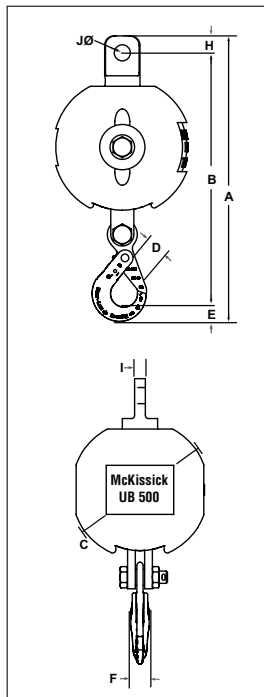

UB-500NS Non Swivel Overhaul Balls with SHUR-LOC® Hooks

Model No.	UB-500 "S" Stock No.	Dimensions (in.)								
		A	B	C	D	E	F	H	I	J
MB4NS35	1036407	20.66	18.18	7.5	1.83	1.15	0.94	1.38	0.75	1.31
MB4NS85	1036416	21.55	19.05	9.25	1.83	1.15	0.94	1.38	0.75	1.31
MB4NS150	1036425	22.55	20.05	11.25	1.83	1.15	0.94	1.38	0.75	1.31
MB4NS200	1036434	22.92	20.42	12.5	1.83	1.15	0.94	1.38	0.75	1.31
MB7NS85	1036443	23.9	21.3	9.25	2.11	1.66	1.16	1.38	0.75	1.31
MB7NS150	1036452	25.28	22.3	11.25	2.11	1.66	1.16	1.38	0.75	1.31
MB7NS200	1036461	25.61	22.65	12.5	2.11	1.66	1.16	1.38	0.75	1.31
MB7NS285	1036470	26.58	23.61	13.88	2.11	1.66	1.16	1.38	0.75	1.31
MB10NS150	1036479	31.24	27.19	11.25	2.49	2.06	1.5	2.00	1.25	1.78
MB10NS200	1036488	31.61	27.56	12.5	2.49	2.06	1.5	2.00	1.25	1.78
MB10NS285	1036497	32.55	28.5	13.88	2.49	2.06	1.5	2.00	1.25	1.78
MB10NS350	1036506	33.11	29.06	15.00	2.49	2.06	1.5	2.00	1.25	1.78
MB10NS650	1036511	34.59	30.54	17.94	2.49	2.06	1.5	2.00	1.25	1.78

